




HEATED HOLDING SHELVES

For Serving Trays, Takeout Containers, Catering Boxes, and Bagged Meals

TEMP SET RANGE: 90° – 190°F (32° – 88°C)

RADIANT “HHS” SERIES

For kitchen expediting areas, self-service displays, point of sale, and “order-ahead” pick-up staging, FWE’s heated shelves keep your “ready-to-eat” guest meals and “to-go orders” hot and safe, with quick access - high visibility format

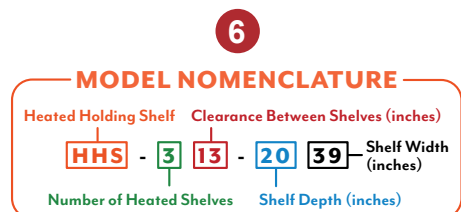


HHS-313-2039
(Shown with Optional
Accessory [ITC]
Individual Temperature
Control on Each Shelf)



HHS-513-2039
 Quick Ship Item

- 1 Keeps serving trays, take-out containers, catering boxes and bagged meals hot and ready for customers
- 2 Blanket elements deliver controlled and consistent radiant heat, eliminating hot and cold spots
- 3 Fast heat up, FWE’s heated shelves reach 175°F (79.5°C) in less than 15 minutes
- 4 Hidden electronic controls keep temperature settings protected from adjustment while allowing operators to save their ideal preset work surface temperature from 90°F to 190°F (32°C to 88°C)
- 5 Adjustable legs for proper placement on uneven flooring
- 6 Additional custom sizes and standard sizes available to fit one shelf to five shelf applications (consult factory)
- 7 All stainless steel construction for ease of cleaning
- 8 Rear hold down brackets to secure unit for safety

***Two year limited warranty**



Blanket Elements Deliver
Consistent Radiant Heat



Hidden Adjustable Controls



Customize Sizing & Spacing



All Stainless Steel
Construction




FOR MODEL-SPECIFIC CERTIFICATIONS SEE FWE.COM/CERTIFICATIONS

((RADIANT HEAT))

SPECIFICATIONS

HEATED HOLDING SHELVES

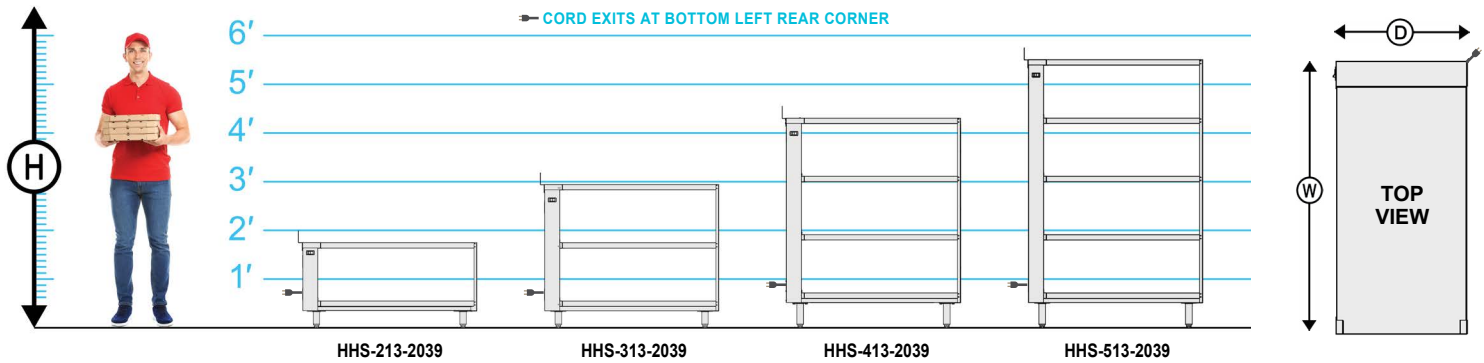

CONSULT FACTORY
FOR SHIPPING CLASS

MODEL NUMBER	NUMBER OF HEATED SHELVES	SHELF SIZE DIMENSIONS [A]			OVERALL EXTERIOR DIMENSIONS IN. (mm) [B]			LEG SIZE	SHIP WT. LBS. (KG)
		SHELF DEPTH	SHELF WIDTH	SHELF CLEARANCE	HIGH "H"	DEEP "D"	WIDE "W"		
HHS-213-2039	2	20"	39"	13"	24" (610)	20.75" (528)	44.25" (1124)	4"	195 (89)
HHS-313-2039	3	20"	39"	13"	38.5" (978)	20.75" (528)	44.25" (1124)	4"	215 (98)
HHS-413-2039	4	20"	39"	13"	54.75" (1391)	20.75" (528)	44.25" (1124)	6"	255 (116)
HHS-513-2039	5	20"	39"	13"	69.25" (1759)	20.75" (528)	44.25" (1124)	6"	330 (150)

[A] Standard shelf depth is 20", standard shelf width is 39". Custom depth, width and shelf spacing available. Consult factory.

[B] Full unit height and depth dimensions include wall mounting bracket and power switch.

Models are available with individual temperature control on each shelf [add "IC"]

ELECTRICAL DATA				
MODEL NUMBER	HHS-213-2039	HHS-313-2039	HHS-413-2039	HHS-513-2039
VOLTS	120	220-240	120	220-240
WATTS	694	826	1041	1239
AMPS	5.8	3.4	8.7	5.2
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	5-15P	6-15P
PLUG CANADA	5-15P	6-15P	5-15P	6-15P
MODEL NUMBER	HHS-413-2039	HHS-513-2039	HHS-413-2039	HHS-513-2039
VOLTS	120	220-240	120	220-240
WATTS	1388	1652	1735	2065
AMPS	11.6	6.9	14.5	8.6
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	5-15P*	6-15P
PLUG CANADA	5-15P	6-15P	5-20P	6-15P

*Dedicated circuit. ▼ Lowest voltage shown is standard.

Customize shelf dimensions and spacing to fit your operation.

Consult Factory.

Powder coat your shelves to match your design.

Consult Factory for Ultra-Premium Color Options.



CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 14 gauge outside corners, 20 gauge stainless steel shelves and polished exterior wall. Rear hold down brackets to secure unit for safety.
INSULATION. High density ceramic insulation throughout each shelf.
LEGS. Each leg shall have a reinforced 10 gauge mounting plate welded to base of unit.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage, receptacle configuration and dedicated circuit information.
HEATING SYSTEM/CONTROLS. Radiant heat system shall include a blanket heating element system. Controls shall include a master ON/OFF switch with power

indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C). Standard factory preset to 175°F (79.5°C).
INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

- ☐ **ELECTRICAL**
- ☐ Individual temperature control [IC]
- ☐ **SPACINGS**
- ☐ Custom shelf size and spacing
- ☐ **LEGS**
- ☐ Legs with flanged feet
- ☐ **EXTRAS**
- ☐ Enclosed on three sides
- ☐ Powder coating
- ☐ LED Lighting