2-Door 1-Tower Draft Box Black 49" Long

738296 (KCHBBD2D1T)
2-Door 1-Tower Draft Box Black 49" Long

Description

2-door Beer dispenser with 1 column. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments.
Automatic Defrost Cooling System and temperature control.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- Refrigerated towers
- Remote CO2 connection setup for streamlined gas management
- Removable rubber bumper guards for airflow spacing and shock absorption
- Side-mounted refrigeration system improves airflow, reduces heat buildup behind the unit, and allows easy service access
- Durable plastic protective cover screen safeguards front-facing digital temp controller
- Cabinet capable of accepting (2) half-barrel, (3) slim quarter-barrel, (4) quarter-barrel, and (6) sixth-barrel kegs

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Pre-wired heavy duty power cord.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.
- Internal drain for easy clean out.
- Stainless steel worktop, durable functionality
- Heavy gauge reinforced steel exterior bottom panel
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 40 mm insulation for energy saving

Optional Accessories

PNC Code	Description
Feet, Wheels and Ramps	
880745	2.5" Caster
880746	2.5" Locking Caster
Other Accessories	
880677	Draft Tower; Double Faucet

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.

Technical specifications

Electric	
Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	3 Amps
Compressor power:	1/5 hp
Power Cable Length:	2500 mm
Capacity:	
Gross capacity:	12.5 cu.feet
Key Information:	
Number and type of grids (included):	()
Door hinges:	1 Left+1 Right
External dimensions, Width:	49 1/16" (1247 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, height:	56 15/16" (1446.5 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	20 " (508 mm)
Internal Dimensions (height):	28 " (711.2 mm)
Internal Dimensions (width):	36 " (914.4 mm)
Net weight:	216 lbs (98 kg)
Shipping width:	50 11/16" (1287 mm)
Shipping depth:	26 3/4" (680 mm)
Shipping height:	58 11/16" (1490 mm)
Shipping weight:	265 lbs (120 kg)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Refrigeration Data	
Operating temperature min.:	32 °F (0 ° C)
Operating temperature max.:	41 °F (5° C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Left
Sustainability	
Refrigerant type:	R290
Refrigerant weight:	110 g

Front

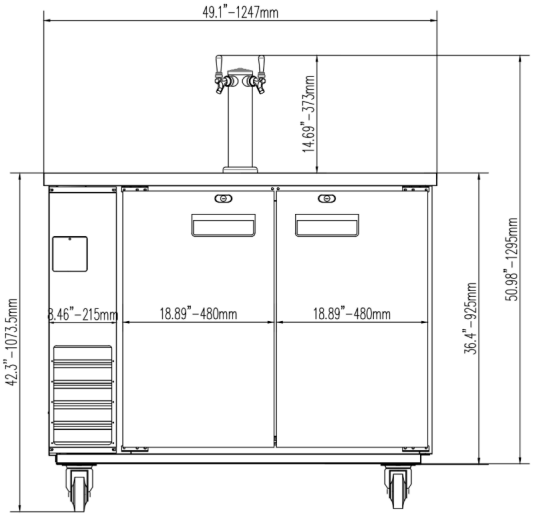

Side

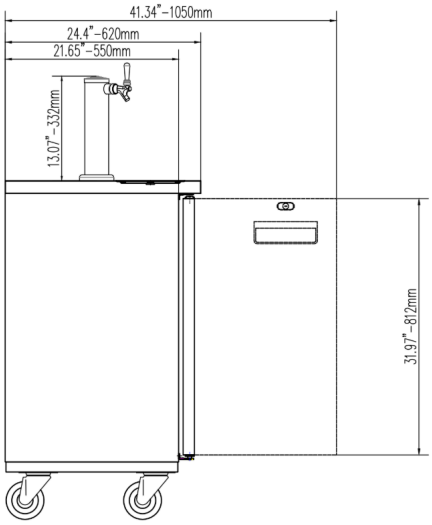

Top

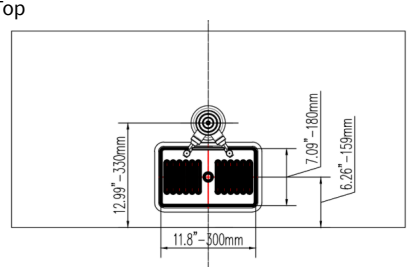

EI = Electrical inlet (power)
RO = Refrigerant Outlet
RI = Refrigerant Inlet