



738290 (KCHUC27.2DR)

2-Drawer Refrigerator Under Counter 27" Long 35.5" Tall

Description

2-drawer refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, sides, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Drawer slides support up to 152 lbs. static capacity.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Pre-wired heavy duty power cord.
- Heavy duty drawer runners.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 60 mm insulation for energy saving.

Optional Accessories

PNC Code	Description
Feet, Wheels and Ramps	
206445	1 Adjustable Foot

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	1.5 Amps
Compressor power:	1/10 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	6.50004 cu.feet
-----------------	-----------------

Key Information:

Door hinges:	Slide in
External dimensions, Width:	27 3/4" (705 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, height:	35 11/16" (907 mm)
Internal Dimensions (depth):	22 13/16" (580 mm)
Internal Dimensions (height):	23 1/2" (597 mm)
Internal Dimensions (width):	22 1/4" (565 mm)
Net weight:	176 lbs (80 kg)
Shipping width:	29 5/16" (745 mm)
Shipping depth:	31 1/2" (800 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	209 lbs (95 kg)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Number of drawers:	2


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Back


Sustainability

Refrigerant type:	R600a
Refrigerant weight:	70 g


Front

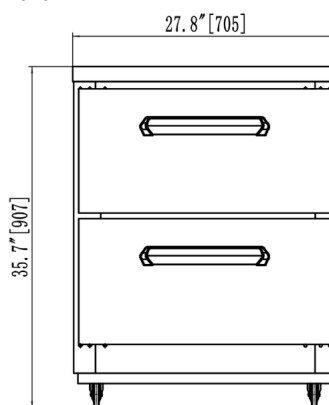

Side

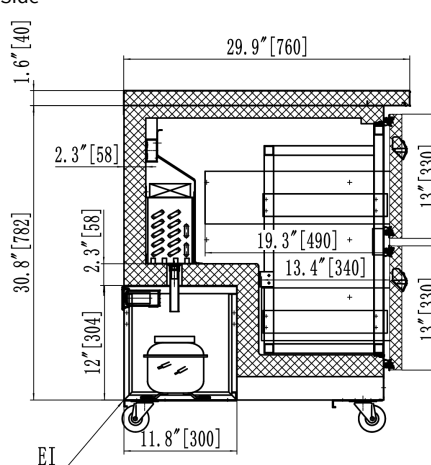

Top

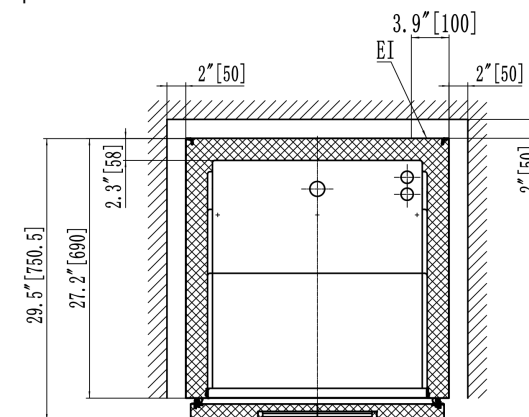

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

