
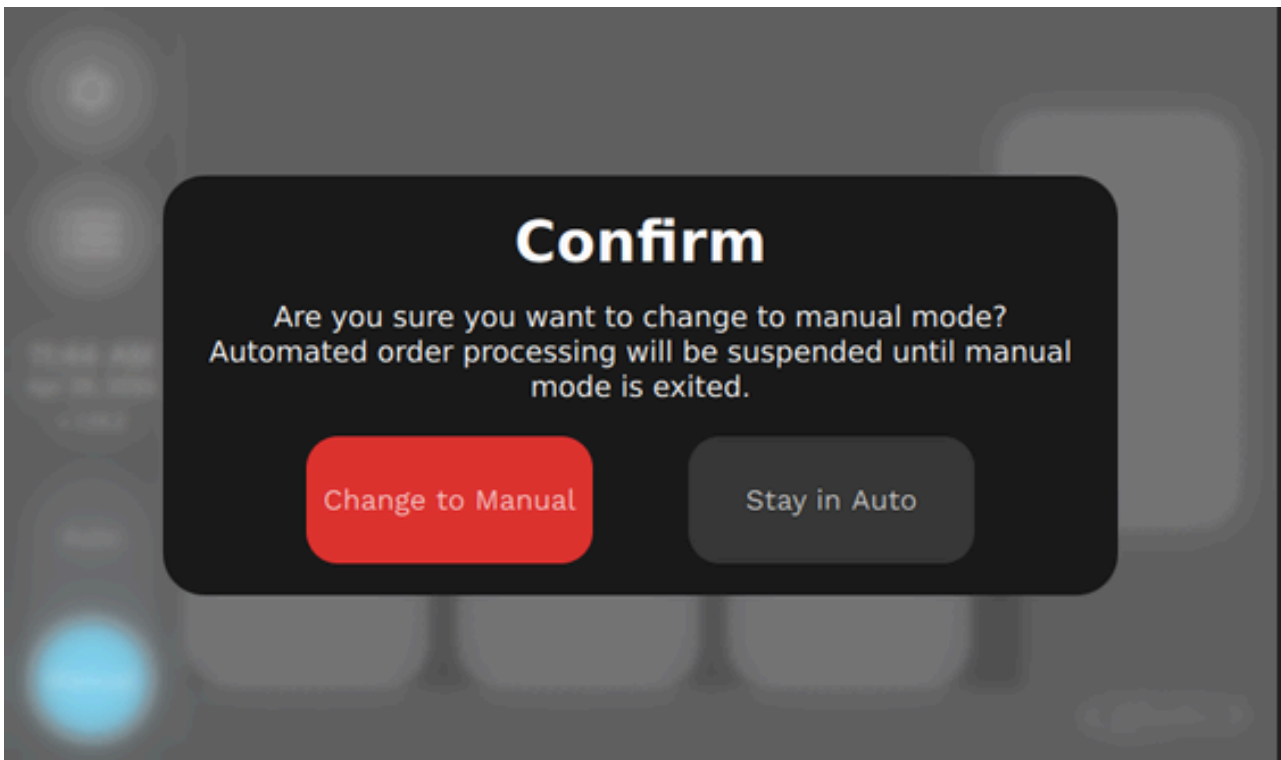


AUTOMATIC CREW SERVE DISPENSER

How to Purge Out Air After Replacing BIB

Need to Prime the Product?

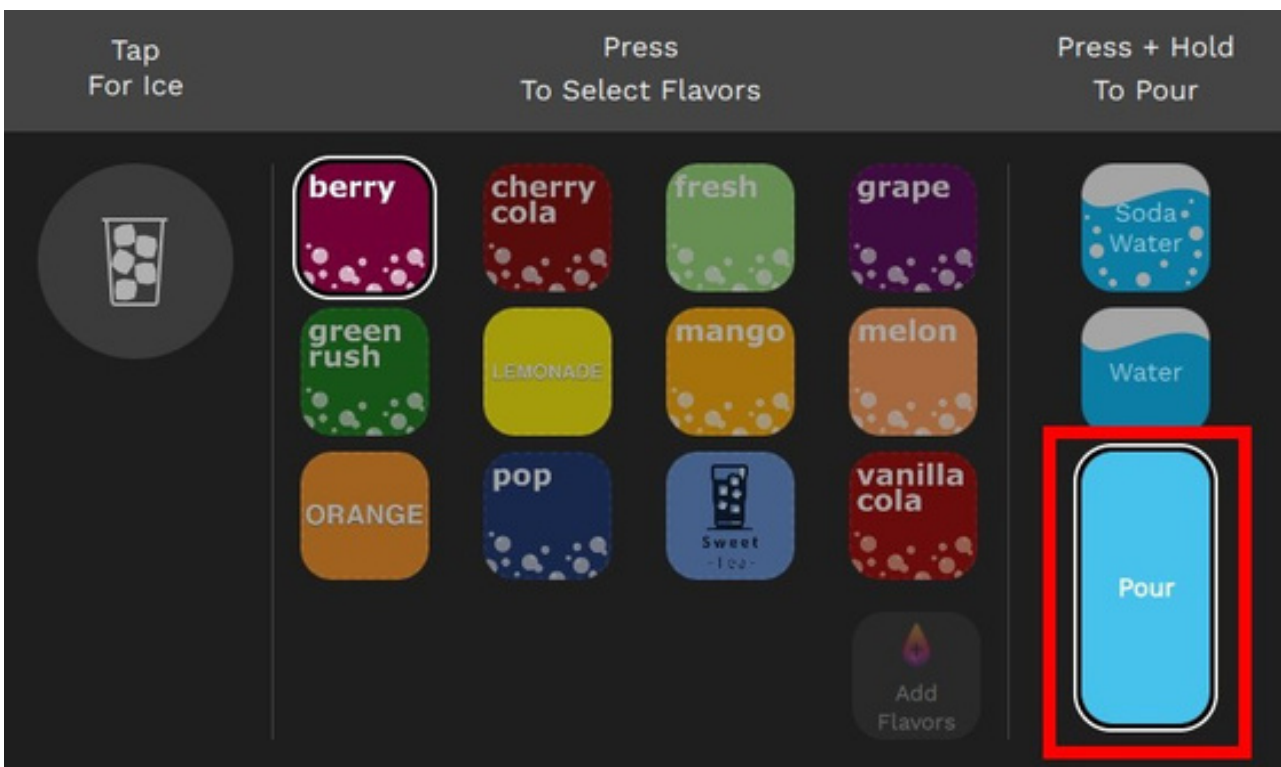

STEP 01	Always make sure BIB connector is secured <i>If not secured, air bubbles will enter into the system, causing foamy and underfilled drinks</i>	
STEP 02	From Order Page, toggle on Manual Mode and Confirm selection	
STEP 03	Select Brand for priming	
STEP 04	Press Pour until no air remains in the line and a steady flow of product is achieved	
STEP 05	Toggle Auto button to return back to Auto Mode, POS orders will resume	