

High-Temperature Undercounter Dishwasher HZ-UH50



24 racks per hour

0.66 gallons of water per rack

Tank Capacity 4.9 gallons

High temperature sanitizing

Top-mounted user interface with digital temperature display
Integrated booster heater capable

120s/180s/240s/600s cycle

Automatic pumped drain



Automatic fill

Electric tank heat


Two dishracks-one peg and one flatware type

Power supply cord 6', NEMA 6-20P plug

3/4" Water inlet connection,
Flowing pressure 29psi~58psi
(2bar ~4bar)

Dimensions (WxDxH)	23.6" x 25" x 31.5"
Voltage and frequency	208V~240V / 60Hz / 1Phase
Total connected load	2.95kW
Water consumption per cycle	0.66 gallon (2.5 litres)
Water inlet temperature	122°F (50°C)~140°F (60°C)
Water hardness	1.5~4.3gpg (25~75mg/L)

Rack size	20"x20"
Tank capacity	4.9 gallon (18.5 litres)
Cycle Time (seconds)	120/180/240/600
Package size	26.8" x 30.7" x 37"
Net weight	145 lbs (66kg)
Gross weight	196 lbs (89kg)

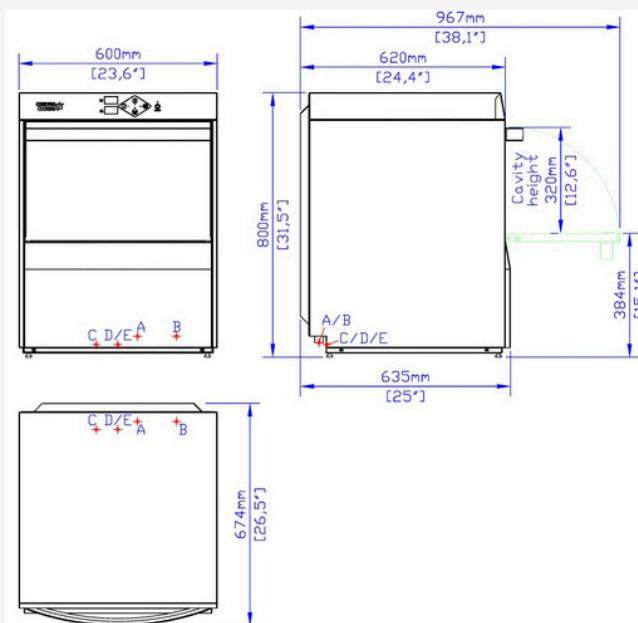

- A – Water inlet (3/4" connect, 5' length)
- B – Power supply (NEMA 6-20P plug, 6' length)
- C – Drain outlet (1 1/4", 6' length)
- D – Rinse aid inlet (1/4" tube, 8' length)
- E – Detergent inlet (1/4" tube, 8' length)

