



738288 (KCHMT60.24.4D)

4-Drawer Mega Top Prep Table 61" Long 24-1/6 Pan

Description

4-drawer mega top refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, sides, top and interior bottom panels in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 61x9x0,5 in. Control panel, and removable drawer gaskets.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Drawer slides support up to 152 lbs. static capacity.
- Removable rubber bumper guards for airflow spacing and shock absorption
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Holds 24 1/6 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty drawer runners.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 58 mm insulation for energy saving

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	4.3 Amps
Compressor power:	1/3 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	15.5 cu.feet
-----------------	--------------

Key Information:

Door hinges:	Slide in
External dimensions, Width:	61 1/4" (1555 mm)
External dimensions, Depth:	35 7/16" (900 mm)
External dimensions, height:	43 5/16" (1100 mm)
Internal Dimensions (depth):	23 13/16" (605 mm)
Internal Dimensions (height):	23 1/2" (597 mm)
Internal Dimensions (width):	56 1/4" (1429 mm)
Net weight:	331 lbs (150 kg)
Shipping width:	62 13/16" (1595 mm)
Shipping depth:	35 13/16" (910 mm)
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	463 lbs (210 kg)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Number of drawers:	4


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Back


Sustainability

Refrigerant type:	R290
Refrigerant weight:	90 g


Front

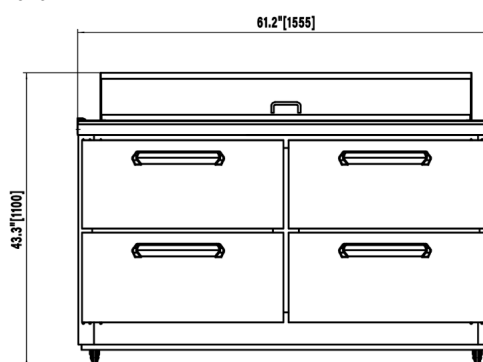

Side

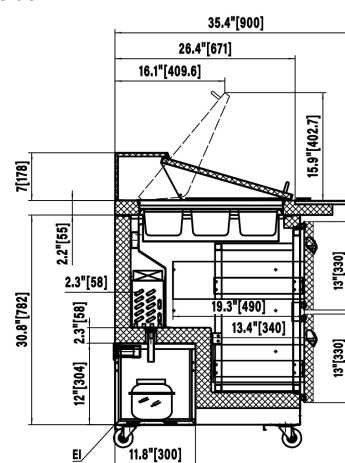

Top

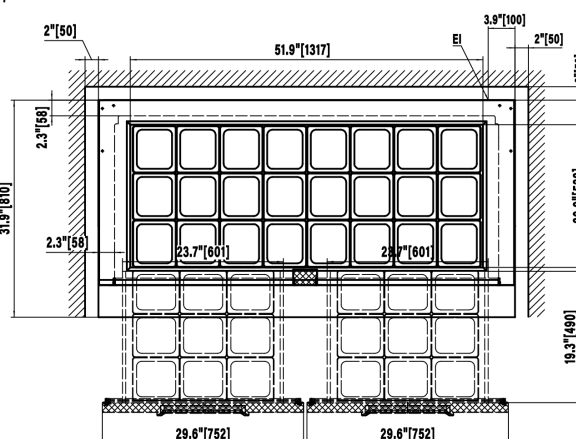

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.
<https://www.kelvinatorcommercial.com>

2026/07/18

3/3