

**738274 (KCHBB72G)**

3-Glass Door Back Bar Refrigerator Black 73" Long

Description

3-glass door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and self-closing doors with 90-degree stay-open feature.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External digital temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- On/off switch controls interior LED lights
- Removable rubber bumper guards for airflow spacing and shock absorption
- Side-mounted refrigeration system improves airflow, reduces heat buildup behind the unit, and allows easy service access
- Durable plastic protective cover screen safeguards front-facing digital temp controller
- Cabinet capable of accepting 504 standard 12-ounce long-neck bottles
- Cabinet capable of accepting 882 standard 12-ounce beverage cans

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Crystal-clear glass door delivers superior product visibility
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Caster-ready base allows installation of heavy-duty casters for durable support and easy repositioning.
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 40 mm insulation for energy saving

Optional Accessories

PNC Code	Description
Containers, Trays and Grids	
880610	Three Shelves for 72" Back Bar (1 Right, 1 Left, & 1 Middle)
880611	Shelf clips (4-pack)
880620	Middle Shelf for 72 back Bar (Solid & Glass Door)
Feet, Wheels and Ramps	
880743	4" Caster
880744	4" Locking Caster
880745	2.5" Caster
880746	2.5" Locking Caster

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	3 Amps
Compressor power:	1/5 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	20.8001 cu.feet
-----------------	-----------------

Key Information:

Number and type of grids (included):	6 (484x476/514x476)
Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, height:	36 1/4" (920 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	20 " (508 mm)
Internal Dimensions (height):	28 " (711.2 mm)
Internal Dimensions (width):	60 " (1524 mm)
Net weight:	331 lbs (150 kg)
Shipping width:	74 5/8" (1896 mm)
Shipping depth:	26 3/4" (680 mm)
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	397 lbs (180 kg)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5° C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Left


Sustainability

Refrigerant type:	R290
Refrigerant weight:	130 g

Front

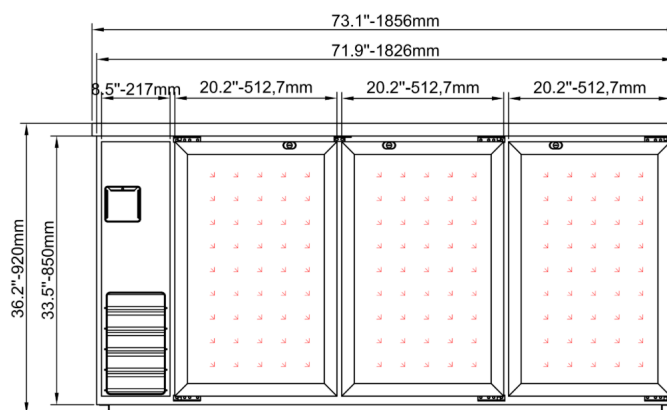

Side

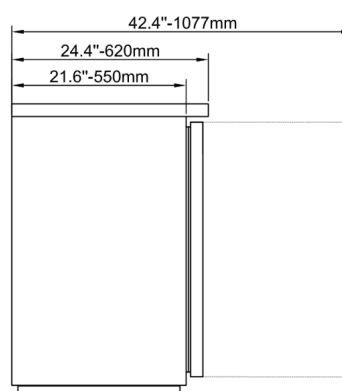

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

