

Gold Standard Toaster | GST-3V



QUALITY, RELIABILITY, AND CONSISTENCY

The Antunes Gold Standard Toaster (GST-3V) provides operators with quality, reliability and consistency in their toasting platform – all in a compact footprint.

The GST-3V model utilizes dual-belt technology that cradles buns as they move along the heat source, controlling quality by eliminating defects such as sticking, slipping and bun marking. With continuously moving belts, operators can immediately load product as needed. The energy efficient design minimizes costs, ensures consistency with every order.



Gold Standard Toaster 3V, GST-3V



Easy-to-operate

Versatile control panel for quick adjustments to toast quality.



Energy-Efficient


Delivers a hot, toasted bun while providing up to 30% energy savings compared to other toasters.



Fully Customizable

Programmable controls allow users to make adjustments to platen heater temperature and motor speed.

Gold Standard Toaster | GST-3V

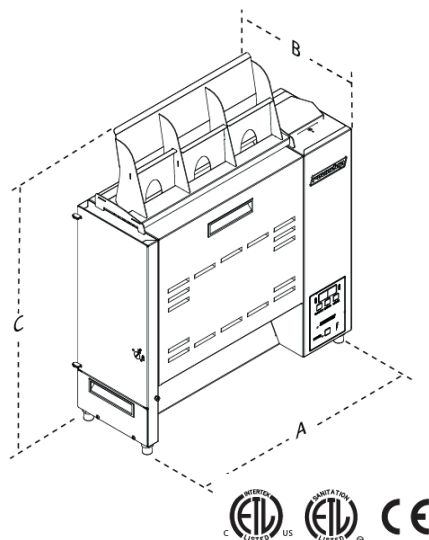

Features:

- Space saving horizontal design
- Energy efficient design prevents outside surface of toaster from becoming hot and reduces heat loss
- **Saves on energy compared to other toasters – up to 30% savings**
- Control quality by eliminating defects such as sticking, slipping and bun marking
- Minimize downtime with continuously moving dual lane belts
- Set your standard with easy to operate control panel for quick adjustments to toast quality
- Independent heel and crown compression settings

GST-3V (with tall bun feeder)

Electrical Ratings

Dimensions and Weight

Model & Mfg. No.	Capacity	Approvals	Plug	Orientation	No. of Lanes	Two-Sided Toasting	Volts	Watts	Hz.	Width	Depth	Height	Shipping Weight
GST-3V 9210874	Variable Speed Motor	 	NEMA 6-20P	Vertical	3	Yes	208-240	3660-4355	50/60	24 5/8 (625 mm)	9 3/16" (233 mm)	30" (763 mm)	130 lbs. (59 kg)

GST-3V (with standard feeder and landing zone)

Model & Mfg. No.	Capacity	Approvals	Plug	Orientation	No. of Lanes	Two-Sided Toasting	Volts	Watts	Hz.	Width	Depth	Height	Shipping Weight
GST-3V 9210881	Variable Speed Motor	 	IEC-309	Vertical	3	Yes	220-240	3180-3750	50/60	25 1/4" (641 mm)	14 9/16" (370 mm)	24 5/8" (625 mm)	130 lbs. (59 kg)

Dimensions are for item without shipping box. Shipping weight includes item and shipping box. Items highlighted in blue are for international markets.



GST-3V
with low-profile bun feeder