



SHARING STATION SPEED LINE

For Room-Temperature and Chilled Grab & Go Items

STAINLESS STEEL "OTR-IB" SERIES

Portable and versatile, this ambient and chilled sharing station provides easy access to grab & go items



OTR-1220-3-9-IB

(Shown with Optional Accessories


Magnetic Backboard, Graphic Magnet, and Graphic Wrap)

- 1 Tiered sharing station holds various grab and go items in 12" x 20" x 4" plastic bins
- 2 Insulated lower shelf is designed to accommodate cold plates for storage of chilled items
- 3 Our speed line equipment is mobile, modular, and flexible. Use these pieces stand alone or combined with complimenting speed line system for a complete look
- 4 Built for daily transport with heavy-duty, maintenance-free, 5" EZ roll casters
- 5 Stands up to daily wear with durable stainless steel construction that is resistant to corrosion
- 6 Customizable to suit your needs with options like magnetic backboard, graphic wrap, and magnet artwork for messaging and branding

***Two year limited warranty**



Holds 12" x 20" x 4" Bins



Insulated Lower Tier for Chilled Product



Matching Speed Lines Available




Built for Transport



FOR MODEL-SPECIFIC CERTIFICATIONS SEE FWE.COM/CERTIFICATIONS

SPECIFICATIONS

SHARING STATION SPEED LINE

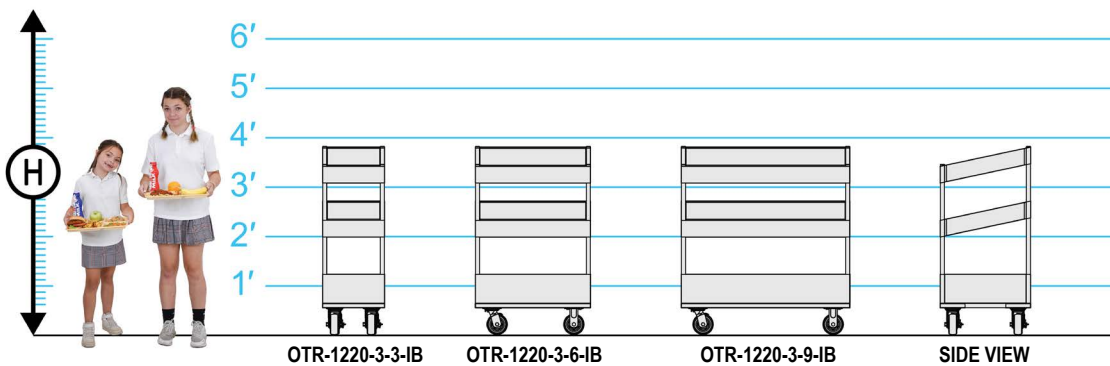

MODEL NUMBER	CAPACITIES OF 12" X 20" X 4" BINS OR GN 1/1 PANS	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CONSULT FACTORY FOR SHIPPING CLASS	
		HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT. LBS. (KG)
OTR-1220-3-3-IB	3	46" (1169)	22.25" (566)	15.25" (388)	5"	105 (48)
OTR-1220-3-6-IB	6	46" (1169)	22.25" (566)	28.25" (718)	5"	135 (62)
OTR-1220-3-9-IB	9	46" (1169)	22.25" (566)	41.25" (1048)	5"	160 (73)



Sharing Stations can be used alone or part of a full speed line system.

CONSTRUCTION. Heliarc welded construction shall consist of welded base frame with 14 gauge formed channels and corner uprights made of heavy gauge 1" square stainless steel tubing reinforcements. Shelves shall be constructed of heavy duty 18 gauge stainless steel.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate shall be secured to 14 gauge stainless steel channel.

UPPER NON-INSULATED STORAGE AREAS. On all models, the top open storage areas are stainless steel lined and sized to hold 12"x20"x4" pans/bins.

BOTTOM INSULATED STORAGE AREA. On all models, the bottom open storage area is size to hold 12" x 20" x 4" pans/bins and is provided with enclosed foam insulation. Storage area shall be 6" deep and stainless steel lined for ice packs or cold plates.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

CASTERS

- ☐ All swivel casters
- ☐ Larger casters (OTR-1220-3-6-IB and OTR-1220-3-9-IB models only)

EXTRAS

- ☐ Drain with plug
- ☐ Magnetic backboard
- ☐ Graphic magnet
- ☐ Graphic wrap
- ☐ 12" x 20" x 4" black bins
- ☐ Cold plate cartridge