



738291 (KCHUC60R)

2-Door Under Counter Refrigerator 61" Long 35.5" Tall

Description

2-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, sides, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature = environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 60 mm insulation for energy saving.

Optional Accessories

PNC Code	Description
Containers, Trays and Grids	
880596	Shelf (left/right) for 60" Mega Top, Salad Top, Undercounter, and Worktop
880611	Shelf clips (4-pack)
Doors and Drawers	
880741	Drawers Kit for L/R section of 60" Mega Top, Salad Top, Undercounter refrigerator, and Work Top refrigerator
Feet, Wheels and Ramps	
206445	1 Adjustable Foot

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	3 Amps
Compressor power:	1/8 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	15.5 cu.feet
------------------------	--------------

Key Information:

Number and type of grids (included):	2 (703x425)
Door hinges:	1 Left+1 Right
External dimensions, Width:	61 1/4" (1555 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, height:	35 11/16" (907 mm)
Number and type of doors:	2 Full
Internal Dimensions (height):	23 1/2" (597 mm)
Internal Dimensions (width):	22 1/4" (565 mm)
Net weight:	234 lbs (106 kg)
Shipping width:	62 13/16" (1595 mm)
Shipping depth:	31 1/2" (800 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	291 lbs (132 kg)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Back


Sustainability

Refrigerant type:	R600a
Refrigerant weight:	80 g


Front

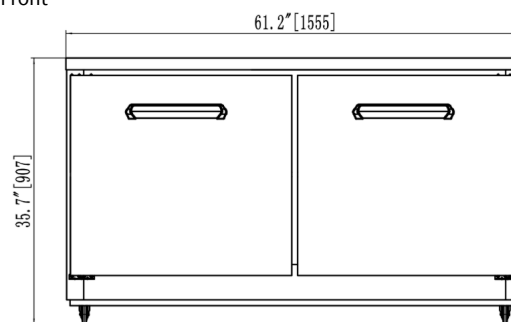

Side

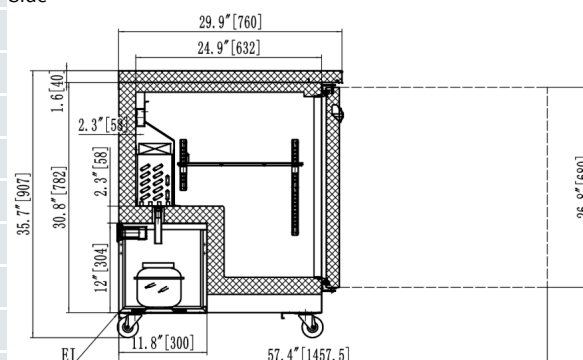

Top

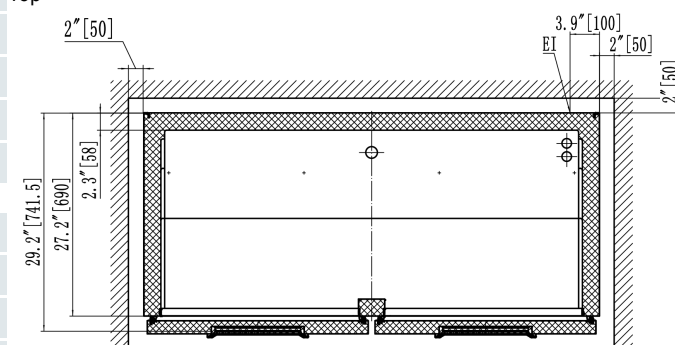

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.
<https://www.kelvinatorcommercial.com>

2026/08/07

3/3