



TILT OUT FRONT GLASS

MODELS

KBD-CG-(40, 50, 60, 80)-S
KBD-CG-(40, 50, 60, 80)-R
KBD-CG-(40, 50, 60, 80)-D

CURVED GLASS BAKERY DELI CASE

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION • TEMPERED TILT-OUT CURVED
FRONT GLASS • TEMPERED SIDE GLASS AND REAR SLIDING DOORS
LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT³	Electrical 115 Volts					NEMA 115 V Plug	Weight lbs		Crate Size (inches)		
				Front	Compressor		LIGHTS Fans HTRS	EVAP Pan		Total Amps	No Crate	With Crate	L"	W"
			H.P		F.L.A									
	KBD-CG-40-S	40.4	13.28	3/8	8.4	1.3	3.3	13.0	5-15P	375	514	43.04	34.5	62.3
	KBD-CG-50-S	52.2	17.50	1/2	9.6	1.5	3.3	14.4	5-20P	436	604	55.02	34.5	62.3
KBD-CG-60-S	60	20.31	1/2	9.6	1.6	3.3	14.5	5-20P	478	666	63	34.5	62.3	
KBD-CG-80-S	77.5	26.56	1/2	9.6	2.7	3.3	15.6	5-20P	557	787	80.5	34.5	62.3	

REMOTE	Model	O.A. Length (inches)	115 Volts Total Amps	B.T.U	Weight lbs	
					No Crate	With Crate
	KBD-CG-40-R	40.4	0.82	2621	319	459
	KBD-CG-50-R	52.2	1.06	3110	381	549
	KBD-CG-60-R	60	1.10	3268	423	611
	KBD-CG-80-R	77.5	2.20	3987	502	732

NON-REFRIGERATED	Model	O.A. Length (inches)	115 Volts Total Amps	NEMA 115 V Plug	Weight lbs	
					No Crate	With Crate
	KBD-CG-40-D	40.4	0.29	5-15P	319	459
	KBD-CG-50-D	52.6	0.33	5-15P	381	549
	KBD-CG-60-D	60	0.41	5-15P	423	611
	KBD-CG-80-D	77.5	0.46	5-15P	502	732

STANDARD FEATURES

Silver colored PVC coated steel front panel
CFC free injected foam insulation
PVC coated steel gray interior
Black steel kick plate
Foamed polystyrene black end panels
Removable rear tempered glass sliding door
Anti-condensate system for front glass
Removable condensate evaporating pan for easy cleaning on self contained units
Height adjustable, tempered glass shelves can be tilted
Temperature and defrost regulated by a digital controller
Digital temperature display
Cord and plug on self-contained and dry units
Leveling feet


OPTIONAL FEATURES

Stainless steel exterior and / or interior
Other colors available
Additional shelves
Joining kit
Partition or product dividers
Scale stand with 120 V receptacle
Condensate evaporating pan for remote cases
Casters-add 4-3/8" to height
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

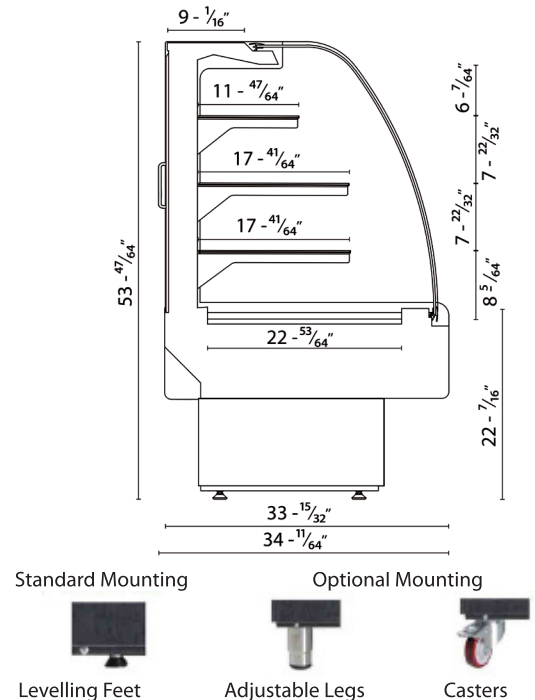

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R452a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.