PLATINUM
SMART-HEAT™ ELECTRIC



KEY FEATURES

- **Flexible Mounting** including wall, ceiling and recessed options with minimal clearance requirements
- **Compact & Elegant Design** for seamless integration into design-focused spaces
- **Durable Construction** with a 304 stainless steel body and tinted ceramic-glass face
- **Customized Heat Output** in increments from 0–100% using the new Affinity Collection of controls
- **Marine Grade Available** built with 316-grade stainless steel to counteract corrosive coastal environments

COLOR OPTIONS





Black




White

DIMENSIONS



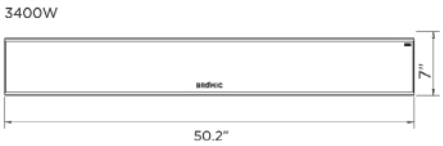

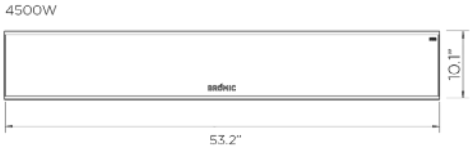

MOUNTING OPTIONS



Wall Mounted



Ceiling Mounted



Standard Recessed Kit




Low Clearance Recess Kit

Discover more about Platinum Smart-Heat™ Electric

Learn more at **bromic.com**

BROMIC HEATING

PLATINUM
SMART-HEAT™ ELECTRIC

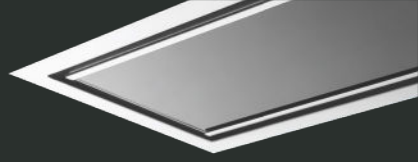


SPECIFICATIONS

PRODUCT NUMBER BLACK | WHITE	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0320019 | BH0320020 BH0320003 | BH0320007	2300W	65ft2	16.5lbs.	208/11.1A 220-240V/9.6A	WALL 72" CEILING 96"	INTERTEK ETL / cETL 5001799	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
BH0320021 | BH0320022 BH0320005 | BH0320008	3400W	108ft2	22lbs.	208V/16.3A 220-240V/14.2A				
BH3622004 | BH3622005 BH3622000 | BH3622001	4500W	143ft2	33lbs.	208V/21.6A 220-240V/18.8A				


MARINE PRODUCT NUMBER BLACK | WHITE								
BH0320023 | BH0320024 BH0320015 | BH0320017	2300W	65ft2	16.5lbs.	208/11.1A 220-240V/9.6A	WALL 72" CEILING 96"	INTERTEK ETL / cETL 5001799	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
BH0320025 | BH0320026 BH0320016 | BH0320018	3400W	108ft2	22lbs.	208V/16.3A 220-240V/14.2A				
BH3622006 | BH3622007 BH3622002 | BH3622003	4500W	143ft2	33lbs.	208V/21.6A 220-240V/18.8A				

CLEARANCES

INCLUDED MOUNT

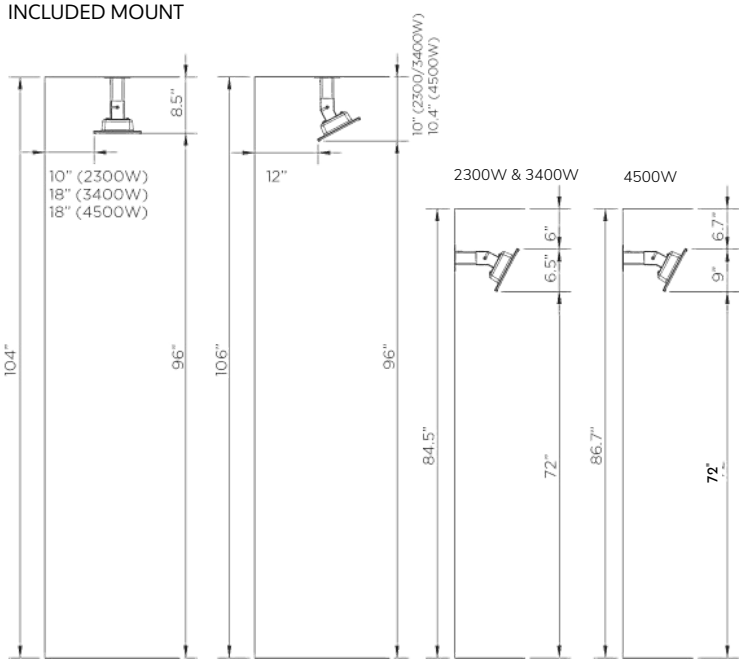

MOUNTING ACCESSORIES

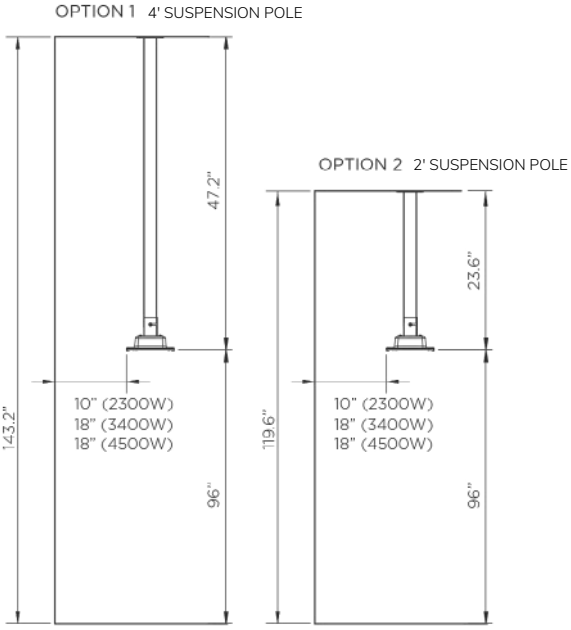

RECESSED
STANDARD RECESS KIT

Refer to Installation Manual. Minimum 10" height above heater required (13.8" for the 4500W model). If you don't have the minimum height required, use the Low Clearance Recess Kit.

LOW CLEARANCE RECESS KIT

The Low Clearance Recess Kit is equipped with an integrated cooling fan that requires a dedicated power supply, independent of the heater's electrical connection. For wiring specifications and installation requirements, refer to the installation manual.

