

Instructions to replace the alfa-omega




Needed tools:
a) wedge b) plastic hammer c) flat screwdriver

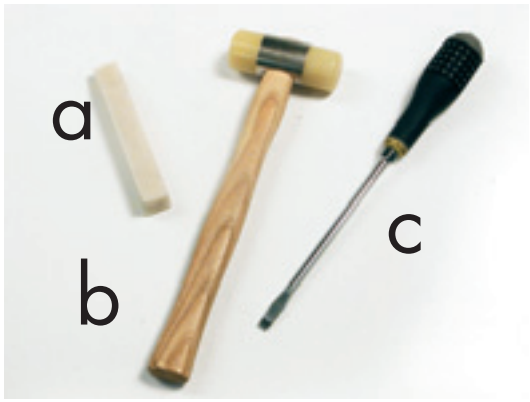


1 Overturn the lounger

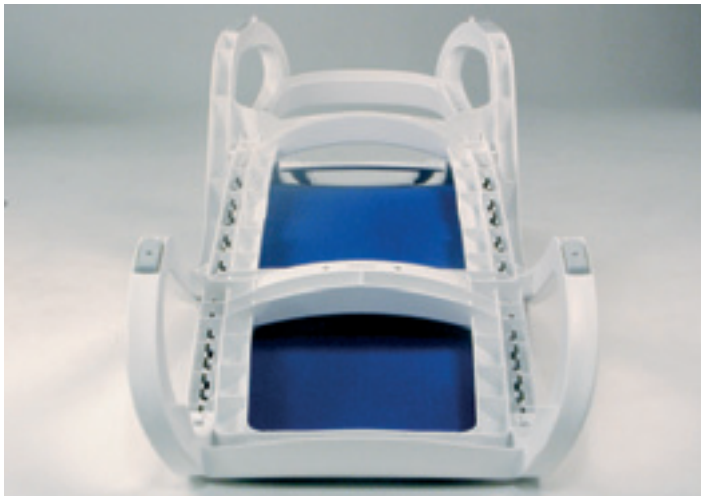

2 Unhook the black frame of the seat and back, starting from the straighter part

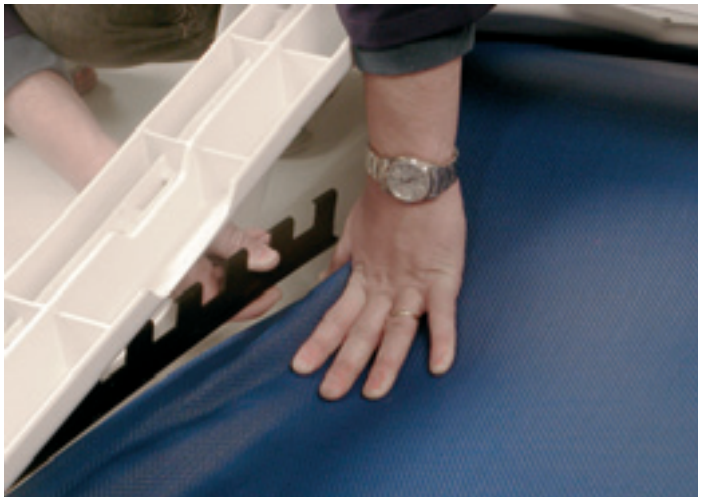


3 Release the fabric by pushing with the back of one's hand

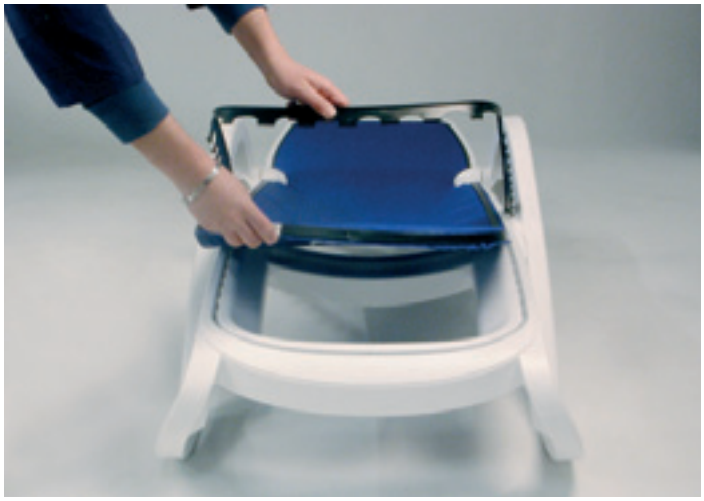

4 Overturn the lounger and remove the fabric and the black frame




5 Put in the black frame

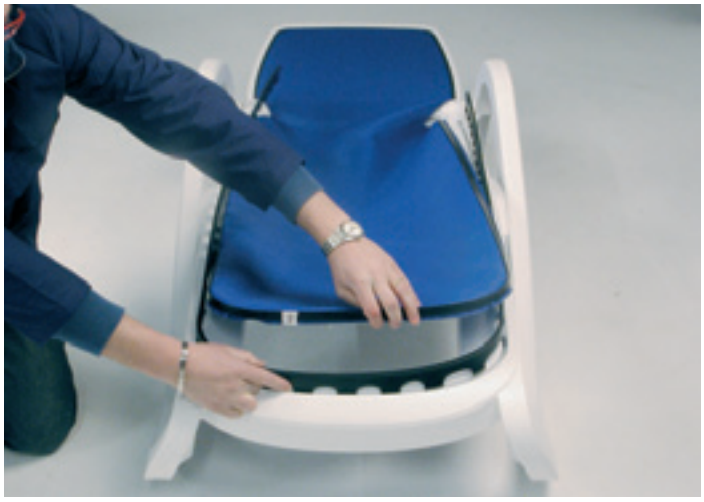


6 Position the fabric



7 Put in the fabric starting from the centre (the centre of the fabric is marked by an arrow)

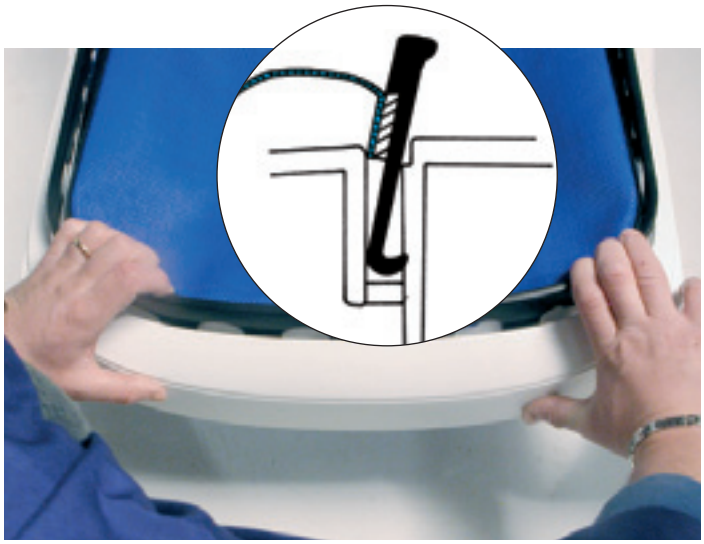

8 Push and put in the fabric under the black frame

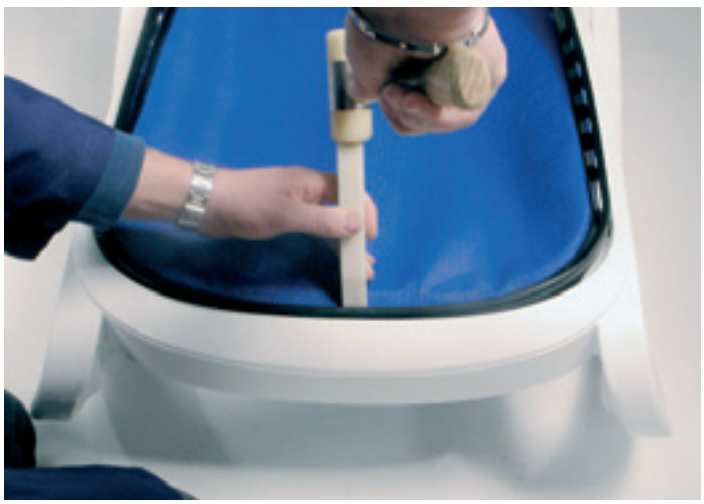

9 Hit the wedge with the hammer in order to put in the fabric and the black frame




10 Finish the insertion and the hook operations by hitting with the hammer




11 Go on with the insertion



12 Complete the insertion

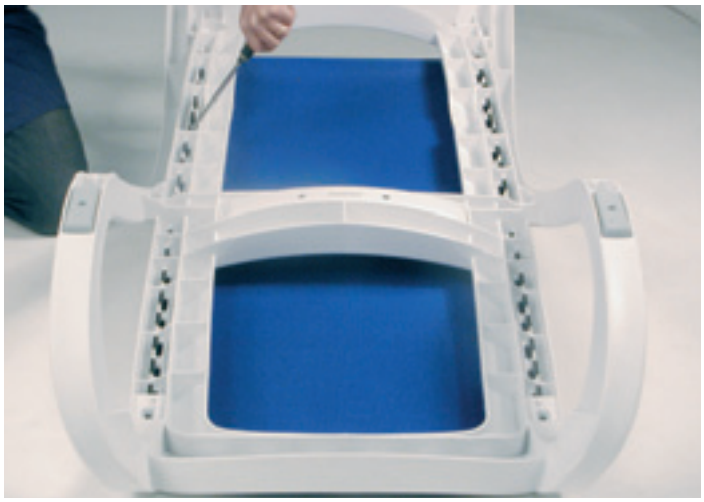

13 Overturn the lounger and check the correct fixing of the black frame

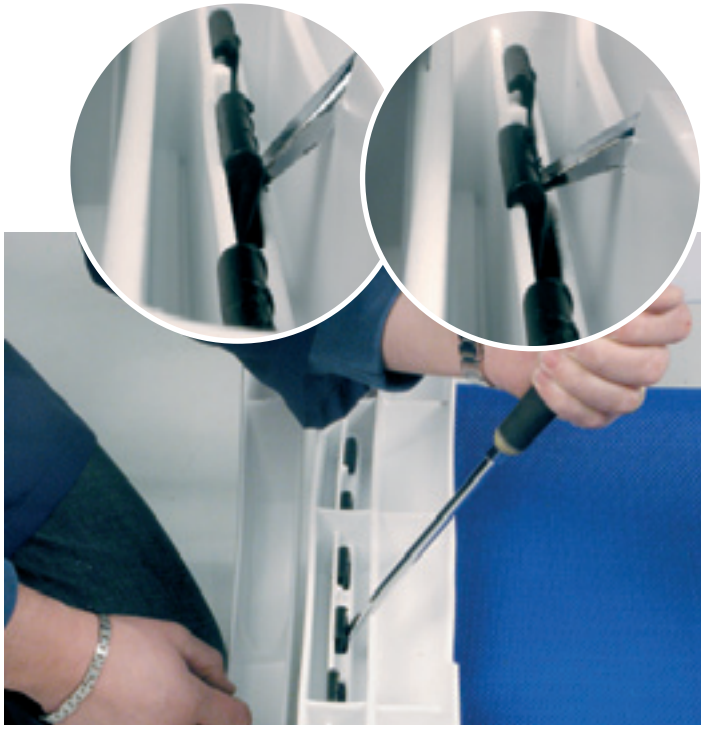

14 Hook with the screwdriver eventual detached hooks