

**738090 (KCNF073WS)**

Sliding Glass Lid Novelty Freezer 38" Long

## Description

Flat glass lid top novelty chest freezer, 38 inches long, with sliding tempered glass lids and unobtrusive frame around the glass to ensure maximum visibility. Lid lock and key included. Internal and external structure in white painted steel for durable and sleek look. (1) coated wire storage basket and NSF thermometer included as standard. Defrost water drain with plug for easy cleaning.

Equipped with NEMA 5-15P plug.

R600a gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
1/5 Years warranty.

## Main Features

- Crystal-clear glass lid showcases products with exceptional clarity
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- NSF®-Certified Temperature Gauge - Durable and reliable for safety in food storage
- Coated wire basket for convenient storage (1 basket included)
- Mechanical temperature control panel ensures reliable operation and easy adjustment
- Internal temperature display providing clear visibility of operating conditions
- Fan-cooled condenser to maintain optimal refrigeration performance under varying conditions
- Load limit indicator line guiding proper capacity usage and maintains optimal performance
- Sliding top doors equipped with wide, durable external pull handles for easy operation and reliable access in fast-paced environments.
- Cabinet capable of accepting 5 standard sized 3-gallon ice cream tubs

## Construction

- Painted white steel exterior, for durable and sleek finish
- Internal drain for easy clean out.
- Durable white painted steel interior, ensuring easy cleaning and long-lasting performance
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.
- Even cooling throughout the unit with advanced cold wall technology
- Tempered glass sliding lids for enhanced visibility and smooth operation
- Locking lids and key protect the contents of the unit.
- Static condenser design enhances efficiency while minimizing moving parts and service requirements

## Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 70 mm insulation for energy saving

## Optional Accessories

| PNC Code       | Description                                                            |
|----------------|------------------------------------------------------------------------|
| <b>Baskets</b> |                                                                        |
| 882003         | Basket for Glass Lid Chest Freezer 16.26x8.66x9.53 in (413x220x242 mm) |

# Technical specifications

## Electric

|                      |                  |
|----------------------|------------------|
| Supply voltage:      | 115 V/1 ph/60 Hz |
| Plug type:           | USA NEMA 5-15P   |
| Current consumption: | 1.2 Amps         |
| Compressor power:    | 1/6 hp           |
| Power Cable Length:  | 3000 mm          |

## Capacity:

|                 |                 |
|-----------------|-----------------|
| Gross capacity: | 14.9382 cu.feet |
|-----------------|-----------------|

## Key Information:

|                                      |                        |
|--------------------------------------|------------------------|
| Number and type of grids (included): | 1 ()                   |
| Door hinges:                         | Slide in               |
| External dimensions, Width:          | 37 13/16" (960 mm)     |
| External dimensions, Depth:          | 20 11/16" (525 mm)     |
| External dimensions, height:         | 33 1/16" (840 mm)      |
| Number and type of doors:            | 2 Glass                |
| Internal Dimensions (depth):         | 15 " (381 mm)          |
| Internal Dimensions (height):        | 26 " (660.4 mm)        |
| Internal Dimensions (width):         | 32 " (812.8 mm)        |
| Net weight:                          | 88 lbs (40 kg)         |
| Shipping width:                      | 23 1/32" (585 mm)      |
| Shipping depth:                      | 39 9/16" (1005 mm)     |
| Shipping height:                     | 34 5/8" (880 mm)       |
| Shipping weight:                     | 88 lbs (40 kg)         |
| Type of external material:           | White Prepainted Steel |
| Type of internal material:           | White Prepainted Steel |


## Refrigeration Data

|                             |                   |
|-----------------------------|-------------------|
| Operating temperature min.: | -18.4 °F (-28 °C) |
| Operating temperature max.: | 3.2 °F (-16 °C)   |
| Defrost type:               | Manual            |
| Evaporator type             | Foamed            |
| Refrigerant unit side:      | Right             |


## Sustainability

|                     |       |
|---------------------|-------|
| Refrigerant type:   | R600a |
| Refrigerant weight: | 25 g  |

## Front

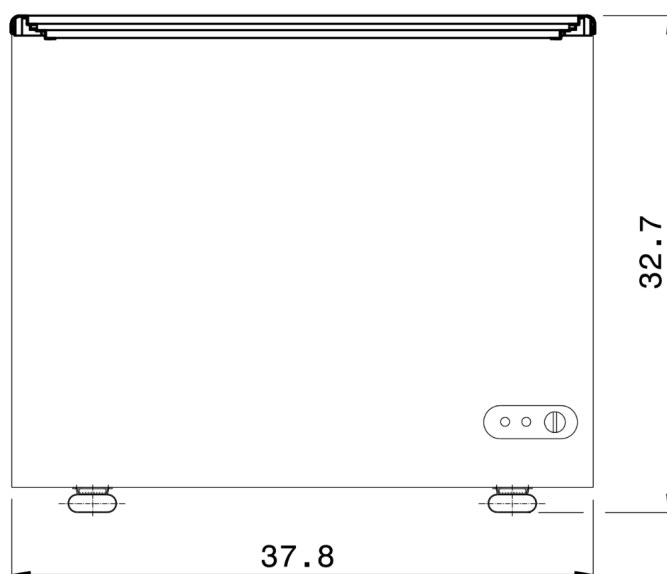

## Side

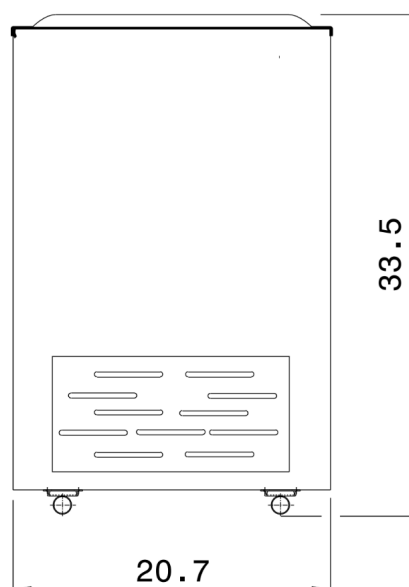

El = Electrical inlet (power)



Part of



**Electrolux  
Professional  
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.  
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.  
<https://www.kelvinatorcommercial.com>

2026/08/04

3/3