TUNGSTEN
SMART-HEAT™ GAS




KEY FEATURES

- **Stylish Industrial Design:** Features a matte black finish with a distinctive honeycomb mesh surface, transforming the traditional style of fixed gas outdoor heaters
- **High Heating Capacity:** Available in 26,000 BTU and 43,000 BTU models, effectively warming outdoor areas up to 215 ft²
- **Durable Construction:** Built with premium materials ensuring longevity and reliability
- **Pivot Arm Bracket:** For greater directional control of the heater making it easy to adjust the flow of heat, so radiant heat is delivered where it's needed

MODEL OPTIONS



300



500

MOUNTING OPTIONS




Wall Mounted




Ceiling Mounted

DIMENSIONS


FRONT PROFILE (WITH HEAT DEFLECTOR)

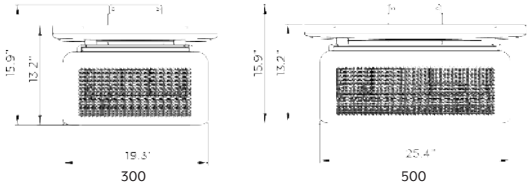


SIDE PROFILE (WITH HEAT DEFLECTOR)



FRONT PROFILE (WITHOUT HEAT DEFLECTOR)

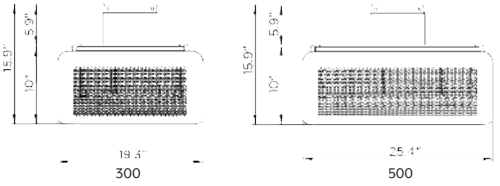

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



Discover more about *Tungsten Smart-Heat™ Gas*

Learn more at **bromic.com**

BROMIC HEATING

TUNGSTEN
SMART-HEAT™ GAS



SPECIFICATIONS


PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0210003-1 | BH0210001-1	300	NG & LPG	160ft²	33lbs.	110V/2A	96"	Intertek 4009079	IPX4	Affinity On/Off Manual Wall Switch
BH0210004-1 | BH0210002-1	500	NG & LPG	215ft²	44lbs.	110V/2A				

* In ideal conditions


CLEARANCES

INCLUDED MOUNT

WALL MOUNT CLEARANCE
WITHOUT HEAT DEFLECTOR

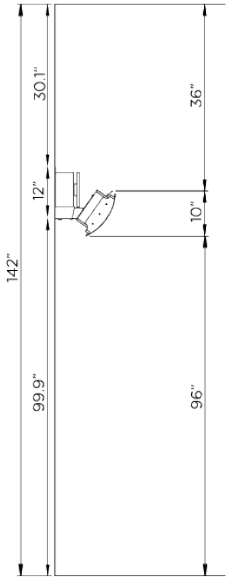


WALL MOUNT CLEARANCE
+ HEAT DEFLECTOR

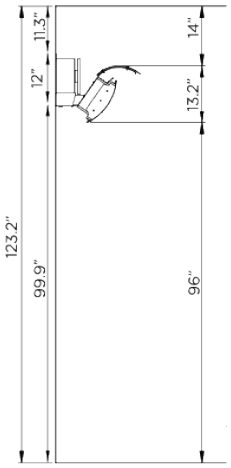


MOUNTING ACCESSORIES
(AVAILABLE IN 9.69˝, 13.62˝, 17.56˝, 25.43˝, 33.31˝ AND 41.18˝)

CEILING MOUNT (33.31˝POLE)
WITHOUT HEAT DEFLECTOR

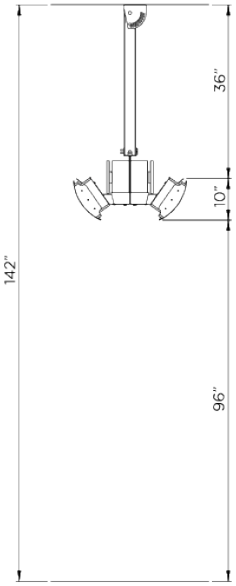

CEILING MOUNT WITH
HEAT DEFLECTOR

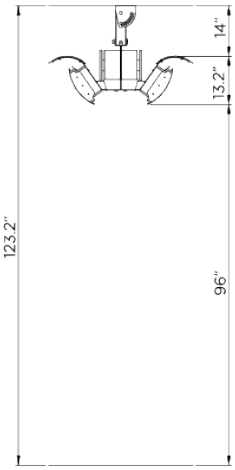

WALL BRACKET

