



MODELS

KBD-FG-(40, 50, 60, 80)-S

KBD-FG-(40, 50, 60, 80)-R

KBD-FG-(40, 50, 60, 80)-D

FLAT GLASS BAKERY DELI CASE

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION
TEMPERED GLASS FRONT, SIDE AND REAR SLIDING DOORS
LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT³	Electrical 115 Volts					NEMA 115 V Plug	Weight lbs		Crate Size (inches)		
				Front	Compressor		LIGHTS Fans HTRS	EVAP Pan		Total Amps	No Crate	With Crate	L"	W"
			H.P		F.L.A									
	KBD-FG-40-S	40.4	15.55	3/8	8.4	1.4	3.3	13.2	5-15P	397	543	43.4	34.5	62.3
KBD-FG-50-S	52.2	20.49	1/2	9.6	1.6	3.3	14.6	5-20P	461	638	55.2	34.5	62.3	
KBD-FG-60-S	60	23.78	1/2	9.6	1.8	3.3	14.8	5-20P	505	703	63	34.5	62.3	
KBD-FG-80-S	77.5	31.1	1/2	9.6	2.65	3.3	15.6	5-20P	588	823	80.5	34.5	62.3	

REMOTE	Model	O.A. Length (inches)	115 Volts Total Amps	B.T.U	Weight lbs	
					No Crate	With Crate
	KBD-FG-40-R	40.4	0.95	2621	337	484
	KBD-FG-50-R	52.2	1.19	3110	403	580
	KBD-FG-60-R	60	1.36	3268	447	645
	KBD-FG-80-R	77.5	2.2	3987	530	773

NON-REFRIGERATED	Model	O.A. Length (inches)	115 Volts Total Amps	NEMA 115 V Plug	Weight lbs	
					No Crate	With Crate
	KBD-FG-40-D	40.4	0.29	5-15P	338	484
	KBD-FG-50-D	52.2	0.33	5-15P	381	549
	KBD-FG-60-D	60	0.41	5-15P	423	611
	KBD-FG-80-D	77.5	0.46	5-15P	530	773

STANDARD FEATURES

Silver colored PVC coated steel front panel
 CFC free injected foam insulation
 PVC coated steel gray interior
 Black steel kick plate
 Foamed polystyrene black end panels
 Removable rear tempered glass sliding door
 Height adjustable, tempered glass shelves can be tilted
 Temperature and defrost regulated by a digital controller
 Removable condensate evaporating pan for easy cleaning on self contained units
 Digital temperature display
 Anti-condensate system for front glass
 Cord and plug on self-contained and dry units
 Levelling feet

OPTIONAL FEATURES

Stainless steel exterior and / or interior
 Other colors available
 Additional shelves
 Joining kit
 Partition or product dividers
 Scale stand with 120 V receptacle
 Condensate evaporating pan for remote cases
 Casters-add 4-3/8" to height
 Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

Standard Mounting




Levelling Feet

Optional Mounting



Adjustable Legs

Castors

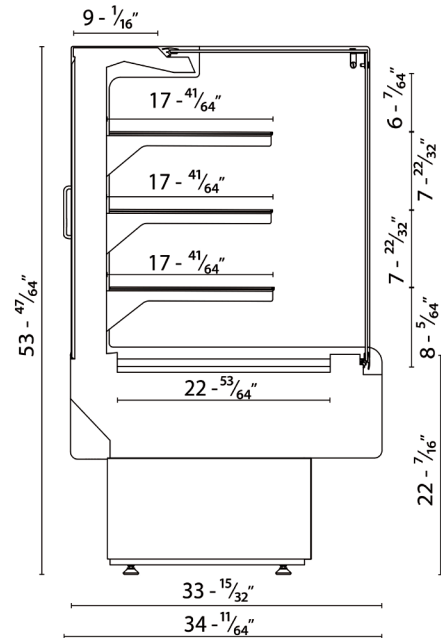

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R452a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

Hydra - Kool is a registered trademark of MVP Group Corp.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE