



738276 (KCHMC49)

12-Crate Single Access Milk Crate Cooler 50" Long

Description

School milk cooler with exterior back panel in white-painted steel, bottom panel in galvanized steel, exterior side panels in white-painted steel and top in 430 stainless steel; interior back and side panels in 430 stainless steel, interior bottom in 304 stainless steel. Interior drain and electronic temperature control. Heavy duty locking casters, removable door gasket, lid and key to protect the unit. External temperature display.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- Wide-opening cabinet provides effortless access for fast loading and unloading.
- External temperature display.
- Removable gasket for easy cleaning operations.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Extra-long removable rubber bumper guards on lids to minimize scratches and dents when opening
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty vinyl coated steel floor protector shelves

Construction

- Painted white steel exterior, for durable and sleek finish
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Locking lid to protect contents of the unit.
- Internal drain for easy clean out.
- Stainless steel worktop, durable functionality
- Pre-wired heavy duty power cord.
- Cold Wall evaporator.
- Stainless steel door(s) for long lasting performance
- Even cooling throughout the unit with advanced cold wall technology

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 38 mm insulation for energy saving

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	USA NEMA 5-15P
Current consumption:	3 Amps
Compressor power:	1/3 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	18.0459 cu.feet
-----------------	-----------------

Key Information:

Number and type of grids (included):	2 (677x577)
Door hinges:	2 Left+2 Right
External dimensions, Width:	49 1/32" (1245 mm)
External dimensions, Depth:	30 9/16" (777 mm)
External dimensions, height:	42 1/64" (1067 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	26 1/2" (673.1 mm)
Internal Dimensions (height):	25 1/2" (647.7 mm)
Internal Dimensions (width):	45 11/16" (1160.78 mm)
Net weight:	220 lbs (100 kg)
Shipping width:	32 1/4" (820 mm)
Shipping depth:	50 13/16" (1290 mm)
Shipping height:	48 5/8" (1235 mm)
Shipping weight:	282 lbs (128 kg)
Type of external material:	White Prepainted Steel
Type of internal material:	Stainless Steel


Refrigeration Data

Operating temperature min.:	35.6 °F (2 °C)
Operating temperature max.:	37.4 °F (3° C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Back


Sustainability

Refrigerant type:	R290
Refrigerant weight:	90 g


Front

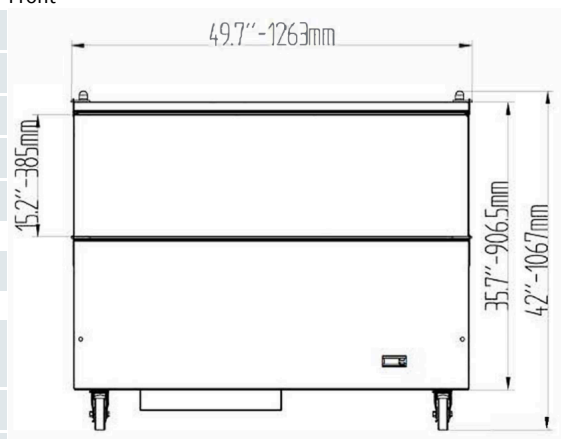

Side

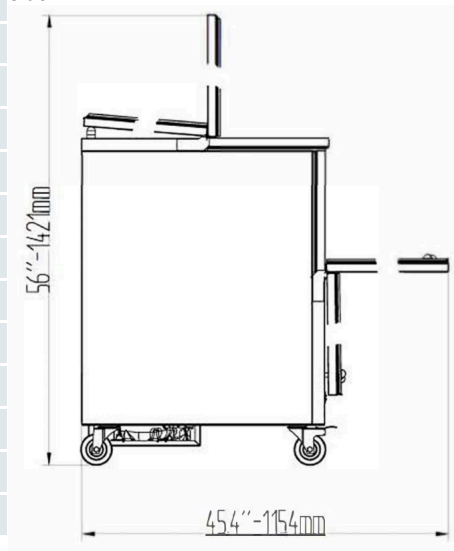

Top

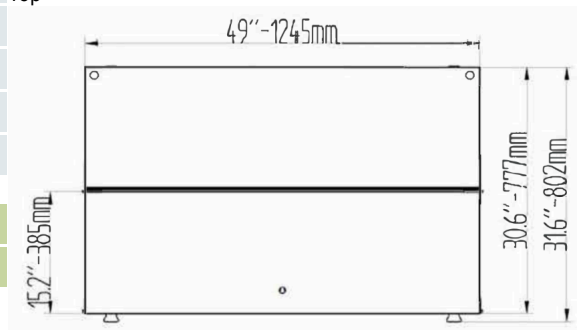

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.
<https://www.kelvinatorcommercial.com>

2026/08/04

3/3