



PRECISE HUMIDITY TEMPERATURE TECHNOLOGY


Universal - Various Size Trays, Pans, and Gastro-NormHUMIDITY SET RANGE: 0RH% - 90RH%  TEMP SET RANGE: 90° - 200°F (32° - 93°C) **CLYMA TE IQ® "PHTT" SERIES**

Clymate IQ® cabinet take the guesswork out of holding foods and provide professional results every time

- 1 Heats up quickly - the Clymate IQ® cabinets' intuitive climate control technology reaches the set humidity and temperature up to 25% faster than the competition
- 2 Ultimate control - simple, color coded controls allow you to independently set relative humidity (0-90%) and temperature (90-200°F / 32-93°C). Includes low water and low temperature indicator lights with option to turn on audible alarm
- 3 FWE's unique removable and adjustable stainless steel tray slides accommodate a universal range of pans and trays
- 4 Fast Recovery - Clymate IQ® returns to set temperature quickly and features self-closing hinges, so you don't have to worry about losing heat and humidity if you open and close the door repeatedly during peak service times
- 5 Consistency throughout - All Clymate IQ® cabinets feature a unique push/pull air distribution system to provide uniform temperature and humidity on every level, throughout the unit
- 6 Place the unit anywhere - all units come with a tri-directional AC cord pocket to give you a better plug placement
- 7 Optional pass-thru doors create a convenient connection from the preparation side to serving areas. Staff is free to focus on customers, taking more orders and serving carry-outs during peak meal times with access from both sides of the cabinet
- 8 Unmatched ease of cleaning - the exclusive large volume, removable water pan makes clean up a breeze - just pull out the pan and lift up the heating element for easy cleaning

***Two year limited warranty****PHTT-12** Quick Ship Item**PHTT-4**

Control Panel



Push-Pull Air Distribution



Fast Recovery




Tri-Directional Cord

**CE IP X4**FOR MODEL-SPECIFIC CERTIFICATIONS
SEE FWE.COM/CERTIFICATIONS**CLYMA TE IQ®**

SPECIFICATIONS


PRECISE HUMIDITY TEMPERATURE TECHNOLOGY

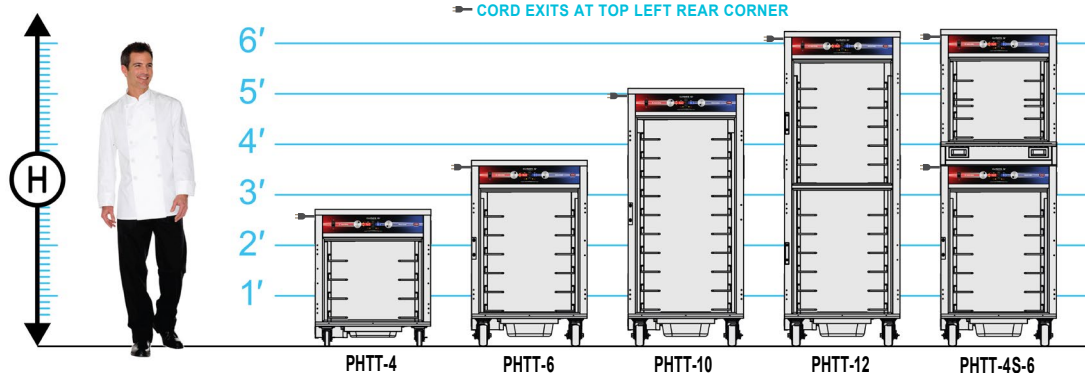

Looking for Controlled Venting?

Scan QR Code to Access the PHTT-CV Spec Sheet

Specification Page: S-02-02000

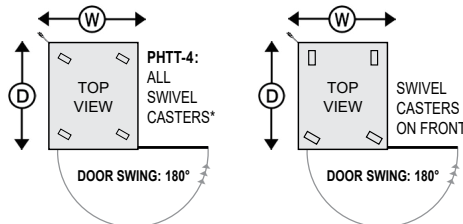

ELECTRICAL DATA

STANDARD			
VOLTS	120	208	220-240
WATTS	2192	1996	2596
AMPS	18.3	9.6	10.8
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	5-20P*	6-15P	6-15P
PLUG CANADA	5-30P	6-15P	6-15P

Optional Element @ 1500W ELECTRICAL DATA

STANDARD			
VOLTS	120	208	220-240
WATTS	1692	1551	2001
AMPS	14.1	7.5	8.3
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	5-15P*	6-15P	6-15P
PLUG CANADA	5-20P	6-15P	6-15P

*Dedicated circuit. Two dedicated circuits required for the PHTT-4S-6.

▼ Lowest voltage shown is standard.

CAPACITIES OF TRAYS/PANS: 4.5" (114 mm) Spacings are Standard [A]

CONSULT FACTORY FOR SHIPPING CLASS

		STANDARD CAPACITY @ 4.5" Spacings (114 mm)								OPTIONAL CAPACITY @ 3" Spacings (76 mm)								OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)				FOR SHIPPING CLASS			
		MODEL NUMBER	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 1/1	GN 2/1	TRAY/PAN SLIDES REQUIRED (Additional 1)	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 1/1	GN 2/1	HIGH "H"			DEEP "D"	WIDE "W"
 ≤34"	PHTT-4 Under Counter	4 pr	4	8	8	8	4	8	8	4	6 pr (2 pr)	6	12	12	12	6	12	12	6	32.5" (826)	32.5" (826)	27.75" (705)	1	3.5"* ALL SWIVEL	260 (118)
	PHTT-6	6 pr	6	12	12	12	6	12	12	6	9 pr (3 pr)	9	18	18	18	9	18	18	9	44.25" (1124)	32.5" (826)	27.75" (705)	1	5"	290 (132)
	PHTT-10	10 pr	10	20	20	20	10	20	20	10	14 pr (4 pr)	14	28	28	28	14	28	28	14	61.25" (1556)	32.5" (826)	27.75" (705)	1	5"	355 (162)
	 PHTT-12	12 pr	12	24	24	24	12	24	24	12	17 pr (5 pr)	17	34	34	34	17	34	34	17	75" (1905)	32.5" (826)	27.75" (705)	2 DUTCH	5"	420 (189)
	PHTT-4S-6 Double Stack	10 pr	10	20	20	20	10	20	20	10	15 pr (5 pr)	15	30	30	30	15	30	30	15	75.5" (1918)	32.5" (826)	27.75" (705)	2	5"	500 (267)

[A] Universal Tray slides accommodate (1) 18" x 26", (2) 14" x 18", (2) 12" x 20", (2) 12" x 18", (1) 20" x 22", (2) 10" x 20", (2) GN 1/1, (1) GN 2/1 trays/pans. Number of tray slides are listed above. Uprights punched on 1.5" (38 mm) centers. Tray slides are adjustable. Standard spacings are 4.5" (114 mm).

PHTT models are available with: **Pass-thru Door** [add "P"]. Note: Dimensions may change when adding this option.

PHTT-4 is available with: **Stackable Design** [add "S"]

* PHTT-4 is an under counter model provided standard with all swivel casters.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners.

INSULATION. "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides and door(s).

HANDLES. Form grip flush-in-wall hand grips recess mounted on each side of unit.

BUMPERS. Bumper stand offs shall be mounted to rear base to allow for proper air circulation.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors shall be self closing and field reversible. High temperature gasket sealed; gasket shall be cabinet mounted. Magnetic work flow door handle shall be full length, vertical, and positive closing.

PHTT-4 is standard with horizontal work flow handle. Each door shall have two (2) heavy-duty edgmount die cast hinges. PHTT-12 shall be standard with dutch doors. Dutch door: two (2) half size doors.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. PHTT-4 shall have a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate.

TRAY SLIDES. Welded rod-style tray slides are stainless steel for greater durability and sanitation. Fully adjustable / removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be punched on 1.5" (38mm) spacings, on center, for easy tray adjustment, and shall easily lift off heavy-duty stainless steel brackets without the use of tools for cleaning.

PHTT SYSTEM/CONTROLS. Built in humidified holding system shall include two (2) separate long life Incoloy nickel-chromium alloy heating elements per cavity to provide separate, adjustable, precise temperature from 90°F to 200°F (32°C to 93°C) and maintain food texture with settings from 0 to 90% RH (Crisp to Moist). Patented Precise Humidity Temperature Technology controls shall be provided for each function. One to control the interior air temperature, and one to control the interior air moisture with hydro immersion water bath. Stainless steel water reservoir shall be removable for ease of cleaning/sanitation. Built-in drip trough has removable drain plug. System shall have circulating fan to assist heat recovery/moist air distribution. Controls shall be up-front, recessed and eye-level for convenience and safety. ON/OFF power switch, humidity cycle light and thermostat cycling light shall also be included.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical data chart for models that may require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

ELECTRICAL

- ☐ 220 volt, 50/60 Hz single phase
- ☐ 15 Amp plug

DOORS

- ☐ Key locking door latch
- ☐ Paddle latch
- ☐ Left hand door hinging
- ☐ Glass doors
- ☐ Flip-up lexan doors
- ☐ Pass-thru doors
- ☐ Magnetic edgmount latch

SPACINGS

- ☐ Extra stainless steel tray slides
- ☐ Fixed rack
- ☐ Shelves

CASTERS

- ☐ All swivel or larger casters
- ☐ Legs

EXTRAS

- ☐ Full extension bumper
- ☐ Heavy-duty push/pull handles
- ☐ Top or bottom corner bumpers (set of 4)
- ☐ Auto water fill
- ☐ Extended top (full size models)
- ☐ X-factor frame (consult factory)



A HATCO COMPANY

FOOD WARMING EQUIPMENT COMPANY, INC.

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS

5599 Highway 31 W, Portland, Tennessee 37148



800-222-4393

WWW.FWE.COM

SALES@FWE.COM

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All specifications subject to change without notice. Errors subject to correction. All rights reserved.

© 26 Food Warming Equipment Company, Inc. | R.26.04