



MODELS

KFM-OF-(40, 50, 60, 80, 100, 120)-S

KFM-OF-(40, 50, 60, 80, 100, 120)-R

**OPEN FRONT DELI CASE
DESIGNED FOR FRESH MEAT**


CASE HOLDS 33°F TO 40°F • LOW VELOCITY FORCED AIR REFRIGERATION MAINTAINS HIGH HUMIDITY
TEMPERED FRONT & SIDE GLASS • CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT ³	Electrical 115 Volts					NEMA 115 V Plug	Weight lbs		Crate Size (inches)		
				Compressor		LIGHTS Fans HTRS	EVAP PAN	Total Amps		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A									
	KFM-OF-40-S	40.4	6.07	3/8	8.4	0.65	3.3	12.38	5-15P	285	445	48	44	42
	KFM-OF-50-S	52.2	8.00	1/2	9.6	0.65	3.3	13.58	5-15P	322	505	59	44	42
	KFM-OF-60-S	60	9.29	1/2	9.6	0.75	3.3	13.68	5-15P	365	564	67	44	42
	KFM-OF-80-S	77.5	12.15	5/8	8.9	1.20	3.3	13.43	5-15P	451	714	85	44	42
	KFM-OF-100-S	101.2	16.00	3/4	16	1.30	3.3	20.63	N/A	565	844	109	44	42
	KFM-OF-120-S	117	18.58	3/4	16	1.40	3.3	20.73	N/A	680	1053	124	44	42

REMOTE	Model	O.A. Length (inches)	115 Volts Total Amps	B.T.U	Weight lbs	
					No Crate	With Crate
	KFM-OF-40-R	40.4	0.2	2548	229	390
	KFM-OF-50-R	52.2	0.2	3015	267	450
	KFM-OF-60-R	60	0.3	3159	311	509
	KFM-OF-80-R	77.5	0.3	4345	419	681
	KFM-OF-100-R	101.2	0.4	5112	511	789
	KFM-OF-120-R	117	0.5	5472	615	988

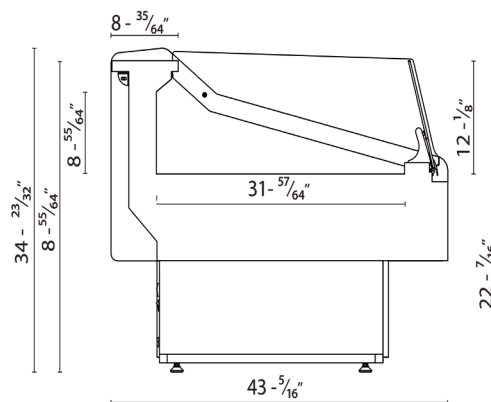

STANDARD FEATURES

CFC free injected foam insulation
Silver colored PVC coated steel front panel
PVC coated steel gray interior
Black steel kick plate
Stainless steel rear work bench
Foamed polystyrene black end panels
Temperature and defrost regulated by a digital controller
Removable condensate evaporating pan for easy cleaning on self contained units
Slide out condensing unit on self-contained units
Digital thermometer
Leveling feet

OPTIONAL FEATURES

Stainless steel exterior
Other colors available
Joining Kit and/or Partition
Condensate evaporating pan for remote cases
White epoxy bi-level wire racks 2 or 3 level step sham
Scale stand with receptacle
Knife support and Cutting board
Casters add 4-3/8" to height
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

Standard Mounting



Leveling Feet

Optional Mounting



Adjustable Legs



Casters

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R452a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE