green . freshness . worldwide AHT



AC W

OPEN AIR MERCHANDISERS



Interior Horizontal LED Lighting for better product visibility



Adjustable Dual Position Shelves allow you to place the shelves in flat or gravity fed positions

Integrated Vertical LED Lighting in Aluminum Posts



Interchangeable Cooling Deck System can be changed in 15 minutes

Low Profile Fixed Rollers allow for Easy Movement



Integrated Night Curtain conserves energy and turns off lights when closed



Electronic Temperature Control with Digital Readout



Low Maintenance, Tube Wire Condenser

Capacity cu. ft. (net)	Shelves	Exterior Dimensions Inches (W x D x H)	Interior Dimensions Inches (W x D x H)	V-Hz-Ph	kWh/24h	Amps	HP	Crated Wt. lbs. (Net/Gross)
11.5 (8.8)	3	36 x 28.2 x 58.9	32 x 22 x 31	120-60-1	18.60	10.5	½	276/315

* Full specs available at www.ahtusa.net *

Updated 5/2014

Cabinet Construction

- Exterior: Galvanized metal cabinet with integrated, impact resistant extruded plastic accent panels.
- Large low-E double pane tempered thermal glass side panels for increased product visibility.
- Interior: Epoxy powder coated steel for increased durability and easy cleaning.
- High-density, CFC-Free, polyurethane insulation.
- Manual, retractable night curtain increases energy efficiency and turns off lights when closed.
- Low profile fixed rollers allow for easy movement of unit and facilitate cleaning of surrounding area.

Shelving

- Three (3) heavy duty epoxy powder coated steel shelves.
  - 2 Upper: 32" W x 12 1/2" D
  - 1 Lower: 32" W x 15 1/8" D
- All shelves are dual position, allowing for horizontal or gravity fed positions, and are adjustable in 1" increments.
- Includes 3 Shelf Pricing Strips.

Lighting

- Interior Horizontal LED Lighting combined with Vertical LED Lighting mounted in each post provide maximum illumination of product.

Electrical

- Ready for connection to 120V/60Hz single phase 20 amp dedicated outlet.
- Includes an 8' cord and plug set.

NEMA 5-15R (Receptacle)



NEMA 5-15P (Plug)



Refrigeration System

- Self-contained environmentally friendly refrigeration system using R290 refrigerant with an Embraco compressor.
- Self-contained, energy efficient, 3 stage hot gas heated drain pan and condensate evaporation system.
- Automatic self-defrost cycle.
- Electronic temperature control with digital readout maintains 36°F to 41°F (1°C to 5°C).
- Bottom mounted interchangeable refrigeration Cooling Deck System slides out for easy maintenance and service.
- Refrigeration System is designed with a Low Maintenance, Wire Tube Condenser and Dual Air Curtain technology to reduce energy consumption and provide additional insulation to products.


Recommended Operating Conditions

- This unit is best suited for an environment where temperatures remain below 77°F (24°C) and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be frequently disrupted. This includes placement near an HVAC vent, open doorway, or fan.
- Requires 4" Clearance behind unit.

Options (Minimum Order Quantity Required)

- Custom Graphics
- Magna Bar Peg System

Technical Drawing

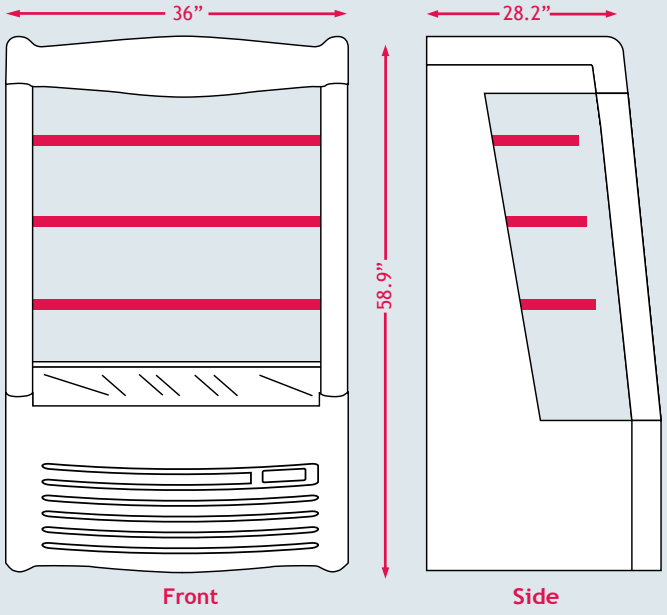

AHT COOLING SYSTEMS USA WARRANTY
One Year Comprehensive Warranty. Contact AHT Technical Service or review warranty document for full details.

3235 Industry Drive
North Charleston, SC 29418
P: 843 767-6855 • F: 843 767-6858
Toll Free: (800) 905.4768
Toll Free FAX: (800) 906.4768
www.ahtusa.net