



ENCLOSED HEATED HOLDING SHELVES

For Pizza Boxes and Various Takeout Containers

TEMP SET RANGE: 90° – 190°F (32° – 88°C)

RADIANT “HHS-PB” SERIES

For kitchen self-service displays, point of sale, and “order-ahead” pick-up staging, FWE’s heated shelves keep your “ready-to-eat” guest meals and “to-go orders” hot and safe in a quick access, high visibility format

- 1 Enclosed design allows for stacking of 2-3 pizza boxes or takeout containers while maintaining heat until pickup
- 2 Maximizes XL pizza holding in a compact footprint
- 3 Blanket elements deliver controlled and consistent radiant heat, eliminating hot and cold spots
- 4 Fast heat up, FWE’s heated shelves reach 175°F (79.5°C) in less than 15 minutes
- 5 Hidden electronic controls keep temperature settings protected from adjustment while allowing operators to save their ideal preset work surface temperature from 90°F to 190°F (32°C to 88°C)
- 6 Adjustable legs for proper placement on uneven flooring
- 7 Additional custom sizes and standard sizes available to fit operational needs (consult factory)
- 8 All stainless steel construction for ease of cleaning
- 9 Rear hold down brackets to secure unit for safety



HHS-606-2224-PB


MODEL NOMENCLATURE



**Two year limited warranty*



Enclosed Design for Stacking



Blanket Elements Deliver Consistent Radiant Heat



Hidden Adjustable Control



All Stainless Steel Construction




FOR MODEL-SPECIFIC CERTIFICATIONS SEE FWE.COM/CERTIFICATIONS

((RADIANT HEAT))

SPECIFICATIONS

ENCLOSED HEATED HOLDING SHELVES

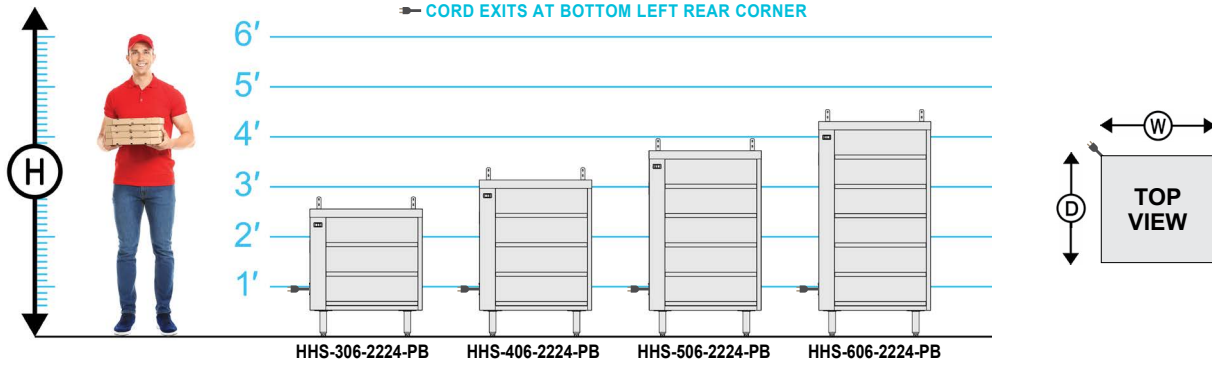

OVERALL EXTERIOR DIMENSIONS IN. (mm) [B]									CONSULT FACTORY FOR SHIPPING CLASS
MODEL NUMBER	NUMBER OF HEATED SHELVES	SHELF SIZE DIMENSIONS [A]			HIGH "H"	DEEP "D"	WIDE "W"	LEG SIZE	SHIP WT. LBS. (KG)
		SHELF DEPTH	SHELF WIDTH	SHELF CLEARANCE					
HHS-306-2224-PB	3	22"	24"	6"	33.5" (851)	25.75" (655)	27.25" (693)	6"	250 (114)
HHS-406-2224-PB	4	22"	24"	6"	40.5" (1029)	25.75" (655)	27.25" (693)	6"	270 (123)
HHS-506-2224-PB	5	22"	24"	6"	47.5" (1207)	25.75" (655)	27.25" (693)	6"	290 (132)
HHS-606-2224-PB	6	22"	24"	6"	54.5" (1385)	25.75" (655)	27.25" (693)	6"	310 (141)

[A] Standard shelf depth is 22", standard shelf width is 24". Custom depth and width available. Consult factory.

[B] Full unit height and depth dimensions include wall mounting bracket and power switch.

Models are available with individual temperature control on each shelf [add "IC"]



Customize shelf dimensions and spacing to fit your operation.

Consult Factory.

ELECTRICAL DATA				
MODEL NUMBER	HHS-306-2224-PB	HHS-406-2224-PB	HHS-506-2224-PB	HHS-606-2224-PB
VOLTS	120	220-240	120	220-240
WATTS	1041	1225	1388	1633
AMPS	8.7	5.1	11.6	6.8
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	5-15P	6-15P
PLUG CANADA	5-15P	6-15P	5-15P	6-15P
MODEL NUMBER	HHS-506-2224-PB	HHS-606-2224-PB		
VOLTS	120	220-240	120	220-240
WATTS	1735	2041	2082	2450
AMPS	14.5	8.5	17.4	10.2
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	5-20P	6-15P
PLUG CANADA	5-15P	6-15P	5-20P	6-15P

*Dedicated circuit. ▼ Lowest voltage shown is standard.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge stainless steel shelves and polished exterior walls, 18 gauge interior side walls. Rear hold down brackets to secure unit for safety.

INSULATION. High density ceramic insulation throughout each shelf.

LEGS. Each leg shall have a reinforced 10 gauge mounting plate welded to base of unit.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage, receptacle configuration and dedicated circuit information.

HEATING SYSTEM/CONTROLS. Radiant heat system shall include a blanket heating element system. Controls shall include a master ON/OFF switch with power indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C). Standard factory preset to 175°F (79.5°C).

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

ELECTRICAL

☐ Individual temperature control [IC]

CASTERS & LEGS

☐ Casters

☐ Legs with flanged feet

EXTRAS

☐ Custom shelf size

☐ Powder coating



A **HATCO** COMPANY

FOOD WARMING EQUIPMENT COMPANY, INC.
COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS
 5599 Highway 31 W, Portland, Tennessee 37148



800-222-4393
 WWW.FWE.COM
 SALES@FWE.COM

FWE products may be covered under one or more of the following U.S. patents: 288,299; 238,300; 3,952,609; 4,192,991. All specifications subject to change without notice. Errors subject to correction. All rights reserved.
 © 26 Food Warming Equipment Company, Inc. | R.26.02