



STAINLESS STEEL PANS

MODELS

KFM-GL-(40, 60, 80)-S

CURVED GLASS GELATO CASE

LOW TEMPERATURE • FORCED AIR REFRIGERATION • LIFT UP TEMPERED FRONT GLASS
12, 16, AND 22 PAN CONFIGURATIONS • CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	O.A. Length (inches)	Electrical 115 Volts				Defrost Amp	Weight lbs
			Compressor		LIGHTS Fans HTRS	Total Amps		
			Case Temp	F.L.A				
	KFM-GL-40-S	40.4	-4 / -7 °F	10.0	0.26	10.3	22.9	661
	KFM-GL-60-S	58.2	-4 / -7 °F	(2) 10.0	0.49	20.5	26.4	860
KFM-GL-80-S	77.5	-4 / -7 °F	(2) 10.0	0.53	20.5	26.4	992	

STANDARD FEATURES

Tempered side glass
CFC free injected foam insulation
Silver colored PVC coated steel front panel
PVC coated steel gray interior
Black steel kick plate
All trim and glass supports-aluminum
Stainless steel pans
Lift up tempered front glass
Thermopane end glass
Stainless steel work bench
Removable rear plexiglass sliding doors
Temperature and defrost regulated by a digital controller
Levelling feet

OPTIONAL FEATURES


Stainless steel interior exterior
Other colors available

PAN CONFIGURATIONS

(10) Pans 14-1/8" long x 6-1/2" wide x 6" deep KFM-GL-40-S
(16) Pans 14-1/8" long x 6-1/2" wide x 6" deep KFM-GL-60-S
(22) Pans 14-1/8" long x 6-1/2" wide x 6" deep KFM-GL-80-S

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

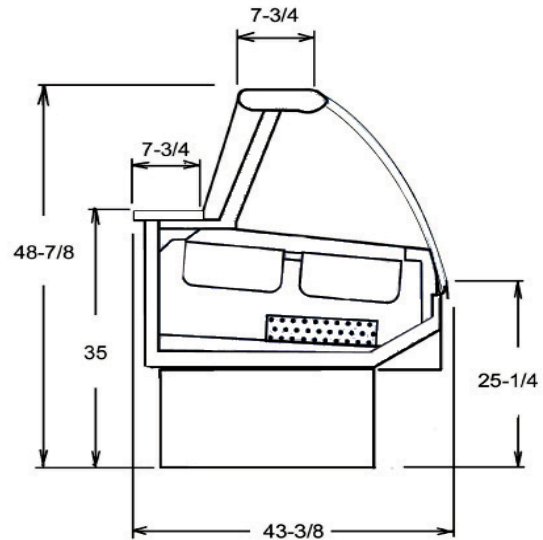

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R452a refrigerant. Ventilation grills at front and back cannot be blocked.

Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE