



738252 (KCHPT50.6)

1-Door Pizza Prep Table 48" Long 6-1/3 Pan

Description

1-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 47.3x17.7x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Side-mounted refrigeration system improves airflow, reduces heat buildup behind the unit, and allows easy service access
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface
- Cabinet capable of accepting a full-size sheet pan (18X26)

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Holds 6 1/3 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Self-closing door with 90-degree stay-open feature.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 58 mm insulation for energy saving

Optional Accessories

PNC Code	Description
Containers, Trays and Grids	
880601	Shelf for 48" Pizza Prep Table
880611	Shelf clips (4-pack)
880701	6-Sheet Pan Rack Kit. Fits KCHRI Models & KCHPT Models
Doors and Drawers	
880694	Drawers Kit for 48" Pizza Prep Table
Panels	
880747	Raised Surface Rail for 48" Pizza Prep Table

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	NEMA 5-15
Current consumption:	5 Amps
Compressor power:	1/3 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	12 cu.feet
-----------------	------------

Key Information:

Number and type of grids (included):	1 (638x634)
Door hinges:	Left
External dimensions, Width:	47 3/8" (1203 mm)
External dimensions, Depth:	32 1/4" (820 mm)
External dimensions, height:	41 5/16" (1050 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	27 1/2" (698.5 mm)
Internal Dimensions (height):	23 " (584.2 mm)
Internal Dimensions (width):	25 1/2" (647.7 mm)
Net weight:	225 lbs (102 kg)
Shipping width:	49 5/8" (1260 mm)
Shipping depth:	33 7/8" (860 mm)
Shipping height:	44 1/2" (1130 mm)
Shipping weight:	291 lbs (132 kg)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Right


Sustainability

Refrigerant type:	R290
Refrigerant weight:	105 g


Front

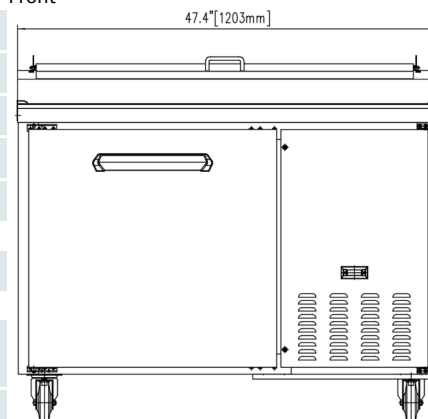

Side

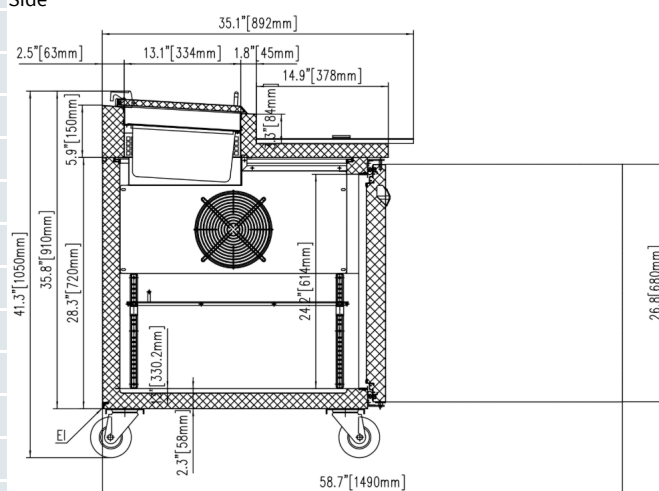

Top

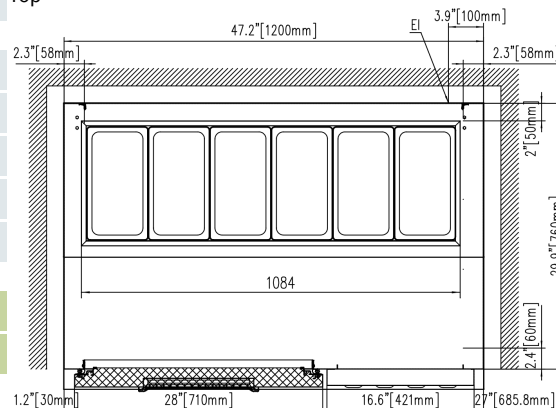

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
a. Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.
<https://www.kelvinatorcommercial.com>

2026/07/19

3/3