



738254 (KCHPT92.12)

3-Door Pizza Prep Table 94" Long 12-1/3 Pan

Description

3-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 91.81 x 17.7 x 0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Side-mounted refrigeration system improves airflow, reduces heat buildup behind the unit, and allows easy service access
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface
- Cabinet capable of accepting a full-size sheet pan (18X26)

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Holds 12 1/3 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Self-closing door with 90-degree stay-open feature.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 58 mm insulation for energy saving

Optional Accessories

PNC Code	Description
Containers, Trays and Grids	
880606	Shelf (left/right) for 94" Pizza Prep Table
880607	Shelf (middle) for 94" Pizza Prep Table
880611	Shelf clips (4-pack)
880701	6-Sheet Pan Rack Kit. Fits KCHRI Models & KCHPT Models
Doors and Drawers	
880696	Drawers Kit for L/R section of 94" Pizza Prep Table
880697	Drawer Kit for Center Section of 94" Pizza Prep Table
Panels	
880749	Raised Surface Rail for 94" Pizza Prep Table

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Plug type:	NEMA 5-15
Current consumption:	5.5 Amps
Compressor power:	1/2 hp
Power Cable Length:	2500 mm

Capacity:

Gross capacity:	32.0001 cu.feet
-----------------	-----------------

Key Information:

Number and type of grids (included):	3 (590x634/627x634)
Door hinges:	1 Left+2 Right
External dimensions, Width:	94 3/16" (2393 mm)
External dimensions, Depth:	32 1/4" (820 mm)
External dimensions, height:	41 5/16" (1050 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	27 1/2" (698.5 mm)
Internal Dimensions (height):	23 " (584.2 mm)
Internal Dimensions (width):	72 1/2" (1841.5 mm)
Net weight:	463 lbs (210 kg)
Shipping width:	96 7/16" (2450 mm)
Shipping depth:	33 7/8" (860 mm)
Shipping height:	44 1/2" (1130 mm)
Shipping weight:	551 lbs (250 kg)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI


Refrigeration Data

Operating temperature min.:	32 °F (0 °C)
Operating temperature max.:	41 °F (5 °C)
Defrost type:	Auto Defrost
Evaporator type	Finned
Refrigerant unit side:	Right


Sustainability

Refrigerant type:	R290
Refrigerant weight:	105 g


Front

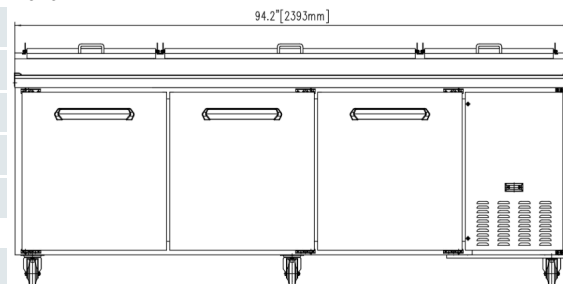

Side

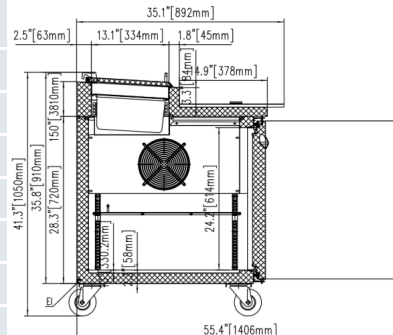

Top

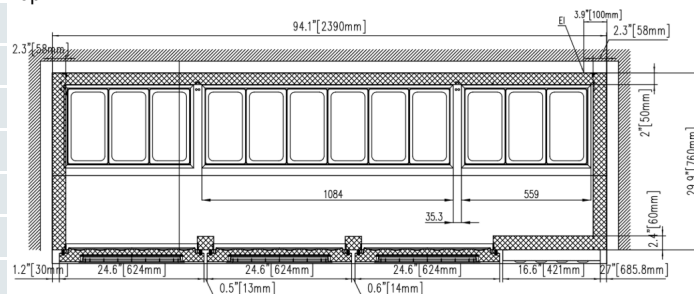

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

