lamber®
S480EKDPS



A high-temperature glasswasher designed to deliver fast, reliable, and hygienic glassware cleaning for bars, cafés, restaurants, and other foodservice operations. Its compact footprint maximizes valuable workspace while advanced temperature controls and automatic washing functions ensure consistently spotless, service-ready glassware throughout the day.

FEATURES

- Built-in soap and rinse aid pumps ensure consistent washing performance and optimal cleaning results.
- Thermocontrol technology guarantees accurate rinse temperatures during every cycle, even under continuous use.
- Soft-touch electronic control panel with temperature display provides intuitive operation and easy monitoring
- Double-wall insulated stainless steel construction reduces heat loss and noise while delivering long-lasting durability.

1 YEAR WARRANTY
PARTS AND LABOR

MADE IN ITALY

SPECIFICATIONS

Power: 208 V – 16 A – 1 PH – 60 Hz
Clearance: 11.8 in (29 cm)
Rack dimensions: 16 x 16 in (40 x 40 cm)
Work height: 12.4 in (31 cm)
Tank capacity: 2.3 gal (8 L)
Wash cycle duration: 2 – 3 – 4 min.
Wash cycle capacity: 30/20/15 baskets/h
Water consumption: Per cycle: 0.5 gal (1 L) Per hour: 15.8 gal (59 L)
Pump delivery: 42.2 gal (159 L)
Wash tank element: 1000 W
Rinse tank element: 3000 W
Boiler capacity: 0.7 gal (2 L)
Water hardness: 7.2 ÷ 12.5 °F (-13 ÷ -10 °C)
Water inlet connection: ¾ in G
Water outlet connection: ¾ in
Inlet water pressure: 40±80 psi
Noise level: < 70 dB (A)
Dimensions: Length: 20 in (50 cm) Width: 18.9 in (48 cm) Height: 29.1 in (73 cm)
Connection: 6-20P (208 V)
Net weight: 108 lb (49 kg)

Included accessories

- CC0075 – 1 inclined glass rack
- CC00052 – 1 open glass rack
- CC00049 – 1 dishwasher rack

c UL us LISTED


CLASSIFIED UL EPH

eurodib
1-888-956-6866
customerservice@eurodib.com
eurodib.com


2026.10

lamber®
S480EKDPS


FRONT VIEW

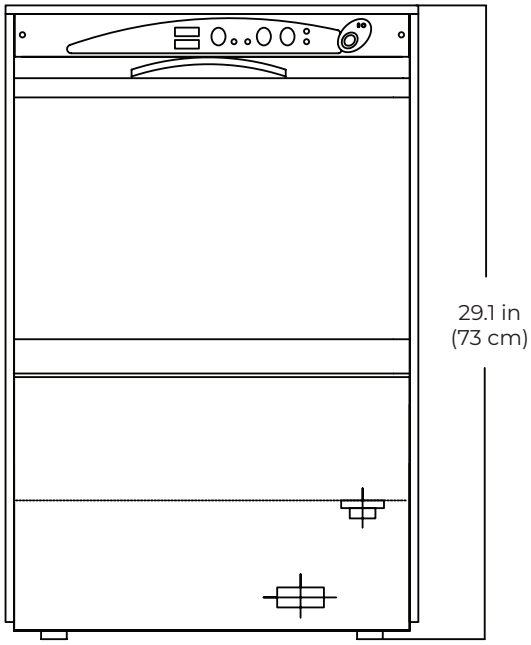

SIDE VIEW

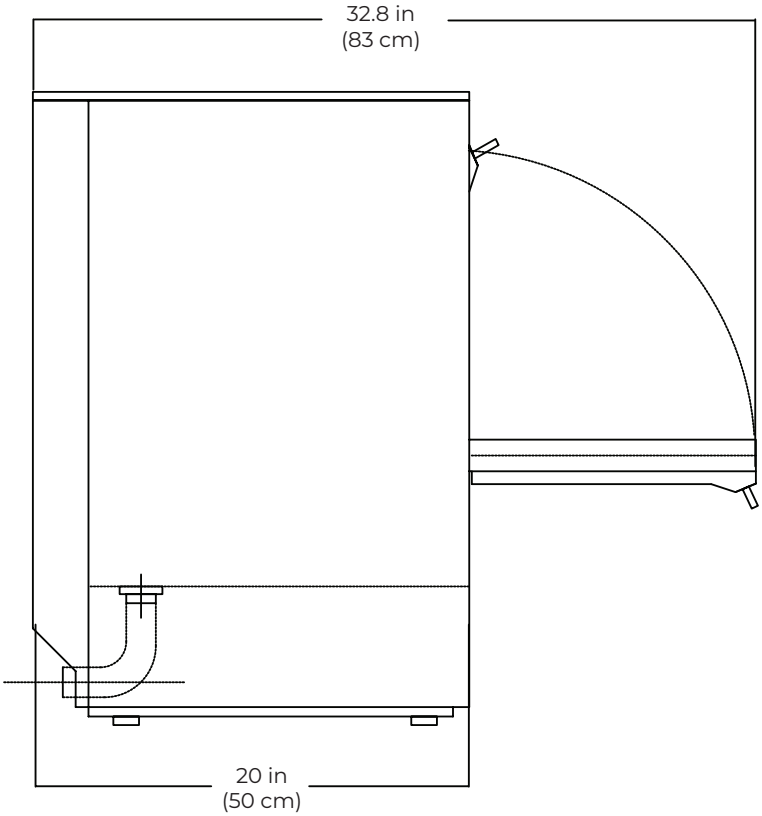

TOP VIEW

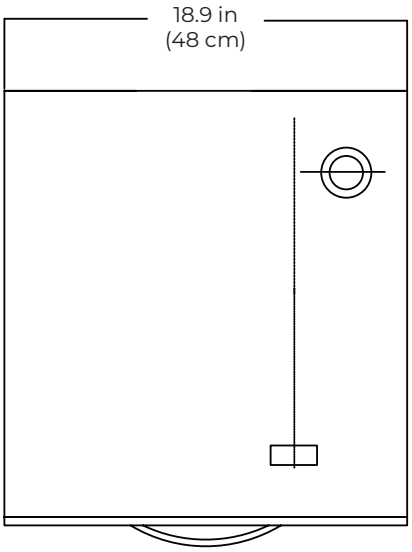

eurodib
1-888-956-6866
customerservice@eurodib.com
eurodib.com

2026.10